

参考规格书

SPECIFICATION FOR REFERENCE

CUSTOMER/客户: _____

CUSTOMER P.N./客户物料号: _____

MODEL NO./产品型号: V30-V1000R120-012W0-IN

PRODUCT NO./产品编号: SCXXX-I0

SAMPLE DATE/送样日期: 2023-08-03

CUSTOMER AUTHORIZED SIGNATURE/客户承认签核		

Please return to us one copy of "SPECIFICATION FOR APPROVAL"
with you approved signature./客户确认签字,
盖章后请回传一份承认书给我司.

ADD: MOSO Industrial Park, Nanshan District, Shenzhen, Guangdong
518108, P. R. China

地址:深圳市南山区茂硕科技园

TEL: 86-755-27657000 27657555

P.C.: 518108

FAX: 86-755-27657908

E-mail: moso@mosopower.com

<http://www.mosopower.com>

拟 制:	项目工程师:	安规工程师:	批 准:

**** Table Of Content/目录 ****

1.	SCOPE.....	5
1.1.	Description.....	5
2.	Input Characteristics/输入特性.....	5
2.1.	Input Voltage & Frequency/输入电压与频率.....	5
2.2.	Input AC Current/AC 输入电流.....	5
2.3.	Inrush Current (cold start at 25°C)/浪涌电流(冷启动).....	5
2.4.	Average Efficiency 平均效率.....	5
2.5.	Energy Consumption /空载功耗.....	5
2.6.	peak current/峰值电流.....	5
3.	Output Characteristics/输出特性.....	6
3.1.	Static Output Characteristics <Vo & R+N>/静态输出特性.....	6
3.2.	Line/ Load Regulation/线性/负载调整率.....	6
3.3.	Turn - on Delay Time/开机延迟时间.....	6
3.4.	Hold-up Time/关机维持时间.....	6
3.5.	Rise Time/上升时间.....	6
3.6.	Fall Time/下降时间.....	6
3.7.	Output Overshoot / Undershoot/输出过冲/欠冲.....	6
3.8.	Output Load Transient Response/输出负载瞬态响应.....	6
3.9.	Capacitive Load Test/容性负载测试.....	6
4.	Protection Requirements/保护要求.....	7
4.1.	Over Current Protection/过流保护.....	7
4.2.	Short Circuit Protection/短路保护.....	7
4.3.	Over Voltage Protection/过压保护.....	7
5.	Environment Requirements/环境要求.....	7
5.1.	Operating Temperature and Relative Humidity/操作温/湿度要求.....	7
5.2.	Storage Temperature and Relative Humidity/存储温/湿度要求.....	7
5.3.	Sea level 5,000 meters/海拔 5,000 米.....	7
5.4.	Vibration/振动.....	7
5.5.	Drop Test/跌落.....	7
6.	Reliability Requirements/可靠性要求.....	7
6.1.	Burn-in/煲机.....	7
6.2.	MTBF/平均故障时间.....	8
6.3.	Product lifetime/产品寿命.....	8

7.	EMI/EMS Standards/EMI/EMS 标准	8
7.1.	EMI Standards/EMI 标准.....	8
7.2.	EMS Standards/EMS 标准.....	8
8.	Safety Standards/安规标准	9
8.1.	Dielectric Strength(Hi-pot)/介电耐压强度(高压)	9
8.2.	Leakage Current/漏电流	9
8.3.	Insulation Resistance/绝缘阻抗.....	9
8.4.	Regulatory Standards/安规标准	9
9.	Mechanical Outline Drawing/外观示意图	10
10.	I/O Marking Drawing/铭牌示意图	11
11.	Package Drawing/包装示意图	12

1. SCOPE

The document detail the electrical, mechanical and environmental specifications of a SMPS, the power supply provide 12W continuous output power.

资料详细描述了一款 **12W**(连续输出功率)开关电源的电气性,结构性及环境等要求。

The power supply shall meet the **HSF** requirement.

此款电源符合 **HSF** 要求。

1.1. Description

- SMPS Adaptor(Wall mount)/插墙式适配器 SMPS Adaptor(Desk-top)/桌面型适配器
 Open Frame/开放式结构 SMPS Unit (With Case)/带铁壳型
 Others/其他

2. Input Characteristics/输入特性

2.1. Input Voltage & Frequency/输入电压与频率

The range of input voltage is from 90Vac to 300Vac single phase.

输入电压范围: 从 **90Vac** 到 **300Vac**, 单相输入。

	Minimum/最小	Nominal/额定值	Maximum/最大
Input Voltage/输入电压	90Vac	90Vac~270Vac	300Vac
Input Frequency/输入频率	47Hz	60Hz/50Hz	63Hz

2.2. Input AC Current/AC 输入电流

0.3A max. @ 90-270Vac input & Full load.

输入电压 **90-270Vac** 满载时, 输入电流不超过 **0.3A**。

2.3. Inrush Current (cold start at 25°C)/浪涌电流(冷启动)

60A max. @ 270Vac input and full load

输入电压 **270Vac** 满载时, 输入电流不超过 **60A**。

2.4. Average Efficiency 平均效率

77.76% min. @115Vac 60Hz/230Vac 50Hz input (@25%, 50%, 75% and 100% of max load)

输入电压 **115V 60Hz/230V 50Hz** 时, **25%、50%、75%和 100%**载时的平均效率不低于 **77.76%**。

2.5. Energy Consumption /空载功耗

No load Consumption $\leq 0.3W$ (115Vac/60Hz,230Vac/50Hz)

输入电压 **115Vac/60Hz,230Vac/50Hz** 时,空载功耗均小于 **0.3W**。

2.6. peak current/峰值电流

peak current 1.3A keeps up for 0.5sec

峰值电流 **1.3A** 持续 **0.5** 秒。

3. Output Characteristics/输出特性

3.1. Static Output Characteristics <Vo & R+N>/静态输出特性

Output Rate	Rated Load/额定负载		Output Range 输出电压范围	R+N 纹波与噪声	Remark 备注
	Min. Load	Max. Load			
+12V	0.0A	1A	11.40~12.60V	120mVp-p	100-240V

Ripple & Noise: Measurement is done by 20MHz bandwidth oscilloscope and the output paralleled a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor. (test under the condition of rated input and rated output)

纹波与噪声: 量测时示波器选用 **20MHz** 带宽限制, 输出端要并联一颗 **0.1uF** 的陶瓷电容和一颗 **47uF** 的电解电容. (在额定输入及输出的条件下检测)

3.2. Line/ Load Regulation/线性/负载调整率

Output Rate	Load Condition/负载条件		Line Regulation 线性调整率	Load Regulation 负载调整率	Remark 备注
	Min. Load	Max. Load			
+12V	0.0A	1A	± 3%	± 5%	

3.3. Turn - on Delay Time/开机延迟时间

3S max. @ 100-240Vac input & Full load.

输入电压 **100-240Vac** 满载时, 开机延迟时间不超过 **3S**。

3.4. Hold-up Time/关机维持时间

10mS min. @ Full load & 100-240Vac input turn off at the worst case.

输入电压 **100-240Vac** 满载时, 关机时间最差情况不小于 **10** 毫秒。

3.5. Rise Time/上升时间

60mS max. @ Rated load.

额定负载时, 上升时间不超过 **60** 毫秒。

3.6. Fall Time/下降时间

60mS max. @ Rated load.

额定负载时, 下降时间不超过 **60** 毫秒。

3.7. Output Overshoot / Undershoot/输出过冲/欠冲

10% max. When the power on or off, when it is the full input voltage and full load.

开关机时, 输出过冲/欠冲均不大于 **10%**。

3.8. Output Load Transient Response/输出负载瞬态响应

Output voltage within 11.4-12.6V. for load step from 25% to 75%, R/S: 0.5A/uS, Frequency: 200uS.

输出电压在 **11.4-12.6V** 之内 对于 **25% to 75%** 的负载阶跃, **R / S: 0.5A / uS**,
频率: **200uS**。

3.9. Capacitive Load Test/容性负载测试

Start normally @ Full Load & C=2200uF at 100Vac/240Vac.

输入电压 **100-240Vac** 满载时, 电解电容 = **2200uF**. 正常启动。

4. Protection Requirements/保护要求

4.1. Over Current Protection/过流保护

Over Current Point Limited/过流点限制: $2.0A > I > 1.2A$ (90-270Vac)

The output shall hiccup when the over currents applied to the output rail, and shall be self-recovery when the fault condition is removed.

当过电流时,输出将进入打嗝模式,当过流情况解除后,产品将会自动恢复正常。

4.2. Short Circuit Protection/短路保护

The input power shall decrease when the output rail short, the power supply shall no damage, and shall be self-recovery when the fault condition is removed.

当输出短路时,产品输入功率降低且不会损伤,当短路情况解除后,产品将会自动恢复正常。

4.3. Over Voltage Protection/过压保护

The power supply has to be protected against over voltage conditions. No damage allowed. The power supply must come back to nominal working without on/off powering after removal of the over voltage condition. $OVP < 18V$ 。

当过压保护时,产品输出功率不会损伤,当过压情况解除后,产品恢复正常. **OVP < 18V**。

5. Environment Requirements/环境要求

5.1. Operating Temperature and Relative Humidity/操作温/湿度要求

-5°C to +45°C, 5%RH to 95%RH

温度摄氏-5度到+45度, 湿度5%到95%。

5.2. Storage Temperature and Relative Humidity/存储温/湿度要求

-40°C to +85°C, 5%RH to 95%RH non-condensing

温度-40°C to +85°C, 湿度5%RH to 95%RH。

5.3. Sea level 5,000 meters/海拔 5,000 米.

5.4. Vibration/振动

10 to 300Hz sweep at a constant acceleration of 1.0G (Breadth: 3.5mm) for 1Hour for each of the perpendicular axes X, Y, Z.

扫描频率: 10 to 300Hz, 加速度: 1.0G(位移: 3.5mm), X, Y, Z 三垂直坐标轴向各振动 1 小时。

5.5. Drop Test/跌落

Height: 1m; the product should be fell off on the hardwood with the thickness of 20mm, Apply one times on all surfaces, total 6 times. The electric performance and Hi-Pot test must be OK after the drop tests.

跌落高度:1 米, 并跌落到厚度为 20mm 的硬木上, 6 个面, 每面各 1 次, 在跌落后电气性能及高压测试 OK.

6. Reliability Requirements/可靠性要求

6.1. Burn-in/煲机

The power supply shall be burn-in for 4 Hours under normal input and 80% rated load at $40°C \pm 5°C$. the electric performance and Hi-Pot test must be OK.

产品至少要在 $40°C \pm 5°C$ 的环境及 80% 额定负载条件下煲机 4 小时, 电气性能及高压测试 OK.

6.2. MTBF/平均故障时间

The MTBF shall be at least 1000,000hours at 25°C, under 100% load and 230VAC input condition.

25°C下, 在满载和 230Vac 输入条件, 平均故障时间至少 1000,000 小时.

6.3. Product lifetime/产品寿命

The Product used in this PSU must be with lifetime of 5 years @25°C @ 230Vac/50Hz Input @100% load at least.

25°C下, 在 230Vac/50Hz 输入条件时,100%负载,产品寿命至少 5 年.

7. EMI/EMS Standards/EMI/EMS 标准

7.1. EMI Standards/EMI 标准

EN 55032
EN 55035

7.2. EMS Standards/EMS 标准

7-2-1 EN 61000-4-2,electrostatic discharge(ESD) requirement/静电抗扰度要求

Discharge characteristic/静电规格	Test level/测试条件	Test criteria/测试标准
Air discharge/空气放电	+/-8KV	A
Contact discharge/接触放电	+/-6KV	A

7-2-2 EN 61000-4-3,radiated electromagnetic field susceptibility(rs)/辐射骚扰场强

Test level/测试条件	Test criteria/测试标准
3V/m (r.m.s)	A
80-1000MHz,80%AM(1KHz) sine-wave	

7-2-3 EN 61000-4-4,electric fast transients(burst) immunity requirement/电快速瞬变脉冲群

Coupling/测试端口	Test level/测试条件	Test criteria/测试标准
AC-input/交流输入	2KV	A
AC-input/交流输入	2KV	A

7-2-4 EN 61000-4-5, surge capability requirement/浪涌抗扰度要求

Surge voltage/雷击电压	judgment criteria/评定标准
Common mode/共模 +/-2KV	A
Differential mode/差模 +/-1KV	

7-2-5 EN 61000-4-6, Induced radio frequency fields conducted disturbances immunity requirement/电源端子传导骚扰实验

Test level/测试条件	Test criteria/测试标准
3V	A
0.15-80 MHz,80%AM(1KHz)	

7-2-6 Assessment criteria /评估标准

Acceptance criteria 可接受标准	Performance 性能
A	Agreed operational behavior within the specified limits 性能不允许变化; 如果性能会发生变化, 则变化的范围在产品规格书规定的范围内.
B	Time limited functional diminishment or malfunction during the tests is permitted . The function is self-reactivated by the unit following completion of the tests . 设备在测试过程中, 性能降低允许在产品规格书要求范围内, 干扰消除后, 设备能恢复正常, 不允许出现复位和任何方式的人工干预.
C	Malfunction is permitted .The function can be reactivated either by reconnection to the mains or by operator intervention . 在测试过程中, 设备允许出现业务中断, 测试完毕后允许自行恢复或者人工干预恢复(包括硬件上干预); 测试中只允许初级防护器件损坏, 并且更换损坏的初级防护器件后, 设备能恢复正常

8. Safety Standards/安规标准

8.1. Dielectric Strength(Hi-pot)/介电耐压强度(高压)

Primary to Secondary: 3000Vac / 10mAMax / 60 second (when safety testing)

初级对次级: 3000Vac / 10mAMax / 60 秒 (安规试验)

Primary to Secondary: 3300Vac / 5mAMax /3S (when production)

初级对次级: 3300Vac / 5mAMax / 3S (生产作业)

8.2. Leakage Current/漏电流

0.25mA max. at 297Vac / 60Hz.

8.3. Insulation Resistance/绝缘阻抗

50MΩ min. at primary to secondary add 500Vdc test voltage


在初级与次级间加 500Vdc 进行测试

8.4. Regulatory Standards/安规标准

Type/安规	Country/国家	Standard/标准	State/状况	
BIS	India	IS13252(part1)	APPROVAL	

9. Mechanical Outline Drawing/外观示意图

The PSU is with 2-pin plug (Brass, Nickel Plated) for India reference.

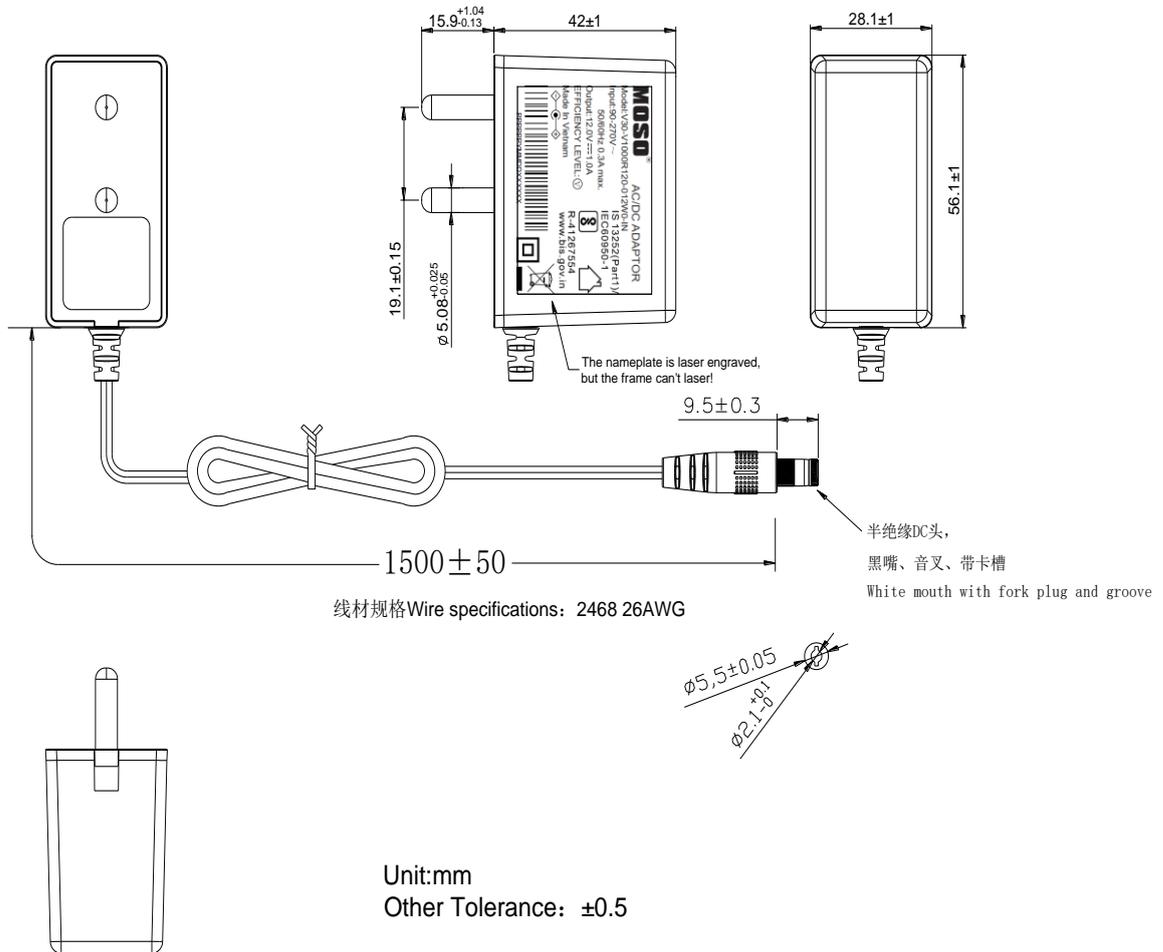


外壳材质: PC 耐温: 125°C

PC+ABS 耐温: 95°C

备注: 1)PC 材质符合球压测试要求;

2)外壳与 DC 线为黑色.防火等级为 UL 94V-0。

10. I/O Marking Drawing/铭牌示意图

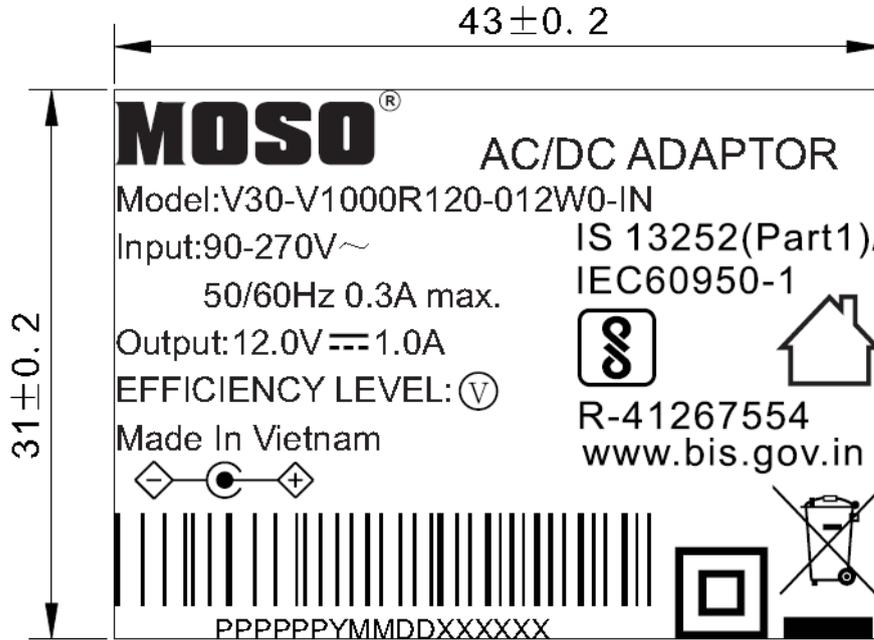


Remark:


- 1. Above label is laser engraved;
- 2. The size of double-insulation is no less than 5mm;
- 3. The size of garbage bin is no less than 7mm.

印度认证字体不小于6pt

11. Package Drawing/包装示意图

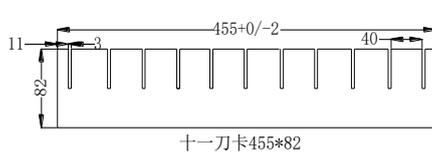


十一刀卡455*82

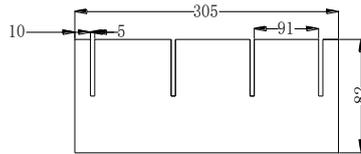





四刀卡305*82

包装说明:

- 一、将产品每PCS装入150*120 (mm)PE袋中包好, 再将包装的产品放入刀卡槽中, 每层装30PCS, 共装4层, 每箱装120PCS
即: 30pcs/层*4层=120PCS/箱
- 二、包装材料使用说明为:
 - 1、十一刀卡455*82用量: 16PCS
 - 2、四刀卡305*82用量: 44PCS
 - 3、PE袋150*120用量: 120PCS
 - 4、平卡455*305用量: 5PCS
 - 5、纸箱470*320*355: 1PCS
- 三、栈板堆放说明为:
 - 1、栈板尺寸为: L1100*W950*H135mm
 - 2、每层放2行*3列=6箱
 - 3、竖直堆放4层*6箱共24箱

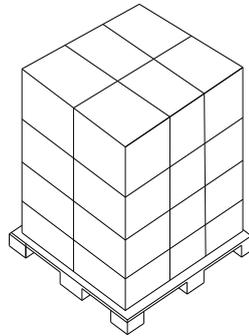


栈板堆放示意图

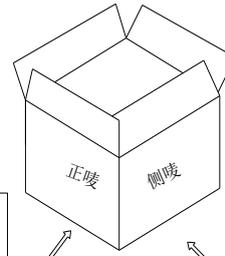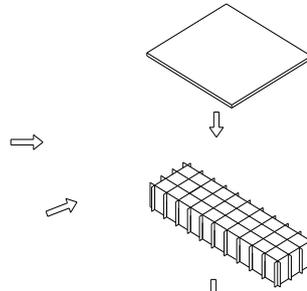

P/O NO.
ITEM NO.
QTY
G. W. : N. W. :
CTN SIZE:

470*320*355MM

纸箱的外尺寸: 470L*320W*355H



产品装入包装箱用胶袋封箱, 位置参考图中所示.

PE 袋包装要求: PE 袋不用胶带封口;

PE 袋用胶带封口;

其它要求;

备注: 若客户未进行选择 PE 袋包装要求或备注时, 我司默认采用 PE 袋不用胶带封口包装方式.