

参考规格书

SPECIFICATION FOR REFERENCE

CUSTOMER: 客 户:	
CUSTOMER P.N.: 客户料号:	
MODEL NO.: 产品型号:	V30-V3000R120-036T0-US
PRODUCT NO.: 产品编号:	SDXXX-U0
SAMPLE DATE: 送样日期:	2025-02-17

CUSTOMER AUTHORIZED SIGNATURE 客户承认签核		

Please return to us one copy of "SPECIFICATION FOR APPROVAL"
with you approved signature.

客户确认签字，盖章后请回传一份承认书给我司。

**ADD: MOSO Industrial Park, Nanshan District, Shenzhen, Guangdong
518108, P. R. China**

地址:深圳市南山区茂硕科技园

TEL: 86-755-27657000 27657555

P.C.: 518108

FAX: 86-755-27657908

E-mail:moso@mosopower.com

<http://www.mosopower.com>

MANUFACTURER AUTOGRAPH 制造商签名			
Reviser 修订	Confirm 确认	Checked 审查	Approval 批准

**** Table Of Content/目录 ****

1. SCOPE/简述	4
1.1. Description /类型	4
1.2. Green Requirements/环保要求.....	4
1.3. Energy Efficiency Requirements/能效要求	4
2. Input Characteristics/输入特性.....	4
2.1. Input Voltage & Frequency/输入电压与频率.....	4
2.2. Input AC Current/AC 输入电流.....	5
2.3. Inrush Current (cold start)/浪涌电流(冷启动).....	5
2.4. Averaged Efficiency/平均效率	5
2.5. Energy Consumption /空载功耗	5
3. Output Characteristics/输出特性	5
3.1. Static Output Characteristics <Vo & R+N>/静态输出特性.....	5
3.2. Line/ Load Regulation/线性/负载调整率	5
3.3. Turn - on Delay Time/开机延迟时间.....	5
3.4. Hold-up Time/关机维持时间	5
3.5. Rise Time/上升时间.....	5
3.6. Fall Time/下降时间.....	6
3.7. Output Overshoot / Undershoot/输出过冲/欠冲.....	6
3.8. Output Load Transient Response/输出负载瞬态响应.....	6
4. Protection Requirements/保护要求.....	6
4.1. Over Current Protection/过流保护	6
4.2. Short Circuit Protection/短路保护	6
4.3. Over Voltage Protection/过压保护	6
5. Environment Requirements/环境要求.....	6
5.1. Operating Temperature and Relative Humidity/操作温/湿度要求.....	6
5.2. Storage Temperature and Relative Humidity/存储温/湿度要求	6
5.3. Sea level shall be low 5,000m./海拔 5,000 米以下。	6
5.4. Vibration/振动.....	6
5.5. Drop in/跌落	6
6. Reliability Requirements/可靠性要求.....	7
6.1. Burn-in/老化	7
6.2. MTBF/平均失效时间	7
6.3. E-caps lifetime/电容寿命.....	7
7. EMI/EMS Standards/EMI/EMS 标准	7
7.1. EMI Standards/EMI 标准	7
7.2. EMS Standards/EMS 标准.....	7
8. Safety Standards/安规标准	9

8.1. Dielectric Strength(Hi-pot)/介电耐压强度(高压)	9
8.2. Leakage Current/漏电流	9
8.3. Insulation Resistance/绝缘阻抗	9
8.4. Regulatory Standards/安规标准	9
9. Mechanical Outline Drawing/外观示意图	10
10. I/O Marking Drawing/铭牌示意图	11
11. Package Drawing/包装示意图	12

1. SCOPE/简述

The document details the electrical, mechanical and environmental specifications of a SMPS, the power supply provide 36W continuous output power.

资料详细描述了一款 36W 连续输出功率开关电源的电气性,结构性及环境等要求.

The power supply shall meet the HSF requirement.

此款电源符合 HSF 要求.

1.1. Description /类型

- SMPS Adaptor(Wall mount)/插墙式适配器 SMPS Adaptor(Desk-top)/桌面型适配器
 Open Frame/开放式结构 SMPS Unit (With Case)/带铁壳型
 Others/其他

1.2. Green Requirements/环保要求

- RoHS:2011/65/EU & (EU) 2015/863;
 REACH:1907/2006/EC;
 Halogen-free:IEC 61249-2-21;
 CA Prop 65;
 POPs:(EU)2023/1608;
 PAHs: 2005/69/EC;
 Packaging Directive:94/62/EC;
 US EPA Toxic Substances Control Act (TSCA);
 MOSO Environmental standards: WI-QM006-G;
 Others

1.3. Energy Efficiency Requirements/能效要求

No.	Country/国家地区	Energy efficiency abbreviation/能效简称	Whether it meets the requirements/是否符合(YES/是 <input checked="" type="checkbox"/> , NO/否 <input type="checkbox"/>)
1	USA/美国	DoE VI	<input checked="" type="checkbox"/>
2		CEC	<input type="checkbox"/>
3	Canada/加拿大	NRCAN	<input type="checkbox"/>
4	Australia/New Zealand/ 澳大利亚/新西兰	GEMS	<input type="checkbox"/>
5	Europe/欧盟	Erp VI	<input type="checkbox"/>
6		CoC V5 Tier 2	<input type="checkbox"/>
7	South Korea/韩国	KMEPS	<input type="checkbox"/>
8	Mexico/墨西哥	MEPS	<input type="checkbox"/>
9	Byelorussia/白俄罗斯	MEPS	<input type="checkbox"/>

2. Input Characteristics/输入特性

2.1. Input Voltage & Frequency/输入电压与频率

The range of input voltage is from 90Vac to 264Vac single phase.

输入电压范围: 从 90Vac 到 264Vac, 单相输入.

	Minimum/最小	Nominal/额定值	Maximum/最大
Input Voltage/输入电压	90Vac	100Vac-240Vac	264Vac
Input Frequency/输入频率	47Hz	50Hz /60Hz	63Hz

2.2. Input AC Current/AC 输入电流

1.0A max. @ 100-240Vac input & Full load.

输入电压 100-240Vac 满载时, 输入电流不超过 1.0A。

2.3. Inrush Current (cold start)/浪涌电流(冷启动)

No damage shall be presented at the cold start

冷启动时不能有损坏。

2.4. Averaged Efficiency/平均效率

87.40% min. @ 115Vac ,230Vac input (@25%, 50%, 75% and 100% of max load).

输入电压 115V 60Hz, 230V 50Hz 时, 25%、50%、75%和 100%载时的平均效率不低于 87.40%。

2.5. Energy Consumption /空载功耗

No load Consumption $\leq 0.1W$ (115Vac/60Hz,230Vac/50Hz).

输入电压 115Vac/60Hz, 230Vac/50Hz 时,空载功耗均小于 0.1W。

3. Output Characteristics/输出特性

3.1. Static Output Characteristics <Vo & R+N>/静态输出特性

Output Rate	Rated Load/额定负载		Output Range 输出电压范围	R+N 纹波与噪声	Remark 备注
	Min. Load	Max. Load			
+12.0V	0.0A	3.0A	11.4V-12.6V	$\leq 120mVp-p$	100-240V

Ripple & Noise: Measurement is done by 20MHz b width oscilloscope paralleled a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor. (test under the condition of rated input and rated output)。

纹波与噪声: 测量时, 示波器选用 20MHz 带宽限制,输出端要并联一颗 0.1uF 的陶瓷电容和一颗 47uF 的电解电容。(在额定输入及输出的条件下检测)。

3.2. Line/ Load Regulation/线性/负载调整率

Output Rate	Load Condition/负载条件		Line Regulation 线性调整率	Load Regulation 负载调整率	Remark 备注
	Min. Load	Max. Load			
+12.0V	0.0A	3A	$\pm 3\%$	$\pm 5\%$	

3.3. Turn - on Delay Time/开机延迟时间

3S max. @ 100Vac to 240Vac input & Full load.

输入电压 100Vac to 240Vac 满载时, 开机延迟时间不超过 3S。

3.4. Hold-up Time/关机维持时间

10mS min. @ Full load & 115Vac/60Hz input turn off at the worst case.

输入电压 115Vac/60Hz 满载时, 关机时间最差情况不小于 10 毫秒。

3.5. Rise Time/上升时间

30 mS max. @ Rated load.

额定负载时, 上升时间不超过 30 毫秒。

3.6. Fall Time/下降时间

50mS max. @ Full load

满载时, 下降时间不超过 50 毫秒。

3.7. Output Overshoot / Undershoot/输出过冲/欠冲

10% max. When the power on or off, when it is the full input voltage and full load.

开关机时, 输入全电压时, 全负载时, 输出电压小于 10%。

3.8. Output Load Transient Response/输出负载瞬态响应

Output voltage within 11.4-12.6V for load step from 20% to 80%, R/S: 0.5A/uS,

Frequency: 100Hz duration and 8mS at 80%.

输出电压在 11.4-12.6V 之间,负载变化: 从 20%到 80%, 斜率 0.5A/uS, 频率: 在 80%负载 100Hz 持续 8 mS

4. Protection Requirements/保护要求

4.1. Over Current Protection/过流保护

Over Current Point Limited/过流点限制: $6A > I > 3.6A$ (100-240Vac)

The output shall hiccup when the over currents applied to the output rail, and shall be self-recovery when the fault condition is removed.

过流时, 输出将进入打嗝模式, 过流情况解除后, 产品将会自动恢复正常。

4.2. Short Circuit Protection/短路保护

The input power shall decrease when the output rail short, the power supply shall no damage, and shall be self-recovery when the fault condition is removed.

当输出短路时,产品输入功率降低且不会损伤,当短路情况解除后,产品将会自动恢复正常。

4.3. Over Voltage Protection/过压保护

The power supply has to be protected against over voltage conditions. No damage allowed.

The power supply must come back to nominal working without on/off powering after removal of the over voltage condition.

当过压保护时,产品输出功率不会损伤,当过压情况解除后,产品恢复正常。

5. Environment Requirements/环境要求

5.1. Operating Temperature and Relative Humidity/操作温/湿度要求

0°C to +40°C, 10%RH to 90%RH

5.2. Storage Temperature and Relative Humidity/存储温/湿度要求

-20°C to +85°C, 5%RH to 95%RH non-condensing

温度-20°C to +85°C, 湿度 5%RH to 95%RH。

5.3. Sea level shall be low 5,000m./海拔 5,000 米以下。

5.4. Vibration/振动

10 to 300Hz sweep at a constant acceleration of 1.0G(Breadth: 3.5mm) for 1Hour for each of the perpendicular axes X, Y, Z.

扫描频率: 10 to 300Hz, 恒定加速度: 1.0G(位移: 3.5mm), X, Y, Z 三垂直坐标轴向各振动 1 小时。

5.5. Drop in/跌落

Height: 1m; the product should be fell off on the hardwood floor with the thickness of

20mm, Apply one times on all surfaces, total 6 times. The electric performance and Hi-Pot test must be OK after the drop tests.

跌落高度:1 米, 并跌落到厚度为 20mm 的硬木地板,6 个面, 每面各 1 次, 在跌落后电气性能及高压测试 OK。

6. Reliability Requirements/可靠性要求

6.1. Burn-in/老化

The power supply shall be burn-in for 2 Hours under normal input and 80% rated load at 40°C ± 5°C, the electric performance and Hi-Pot test must be OK.

40°C ± 5°C, 电源在正常输入电压和 80% 额定负载条件下老化 2 小时后, 电气性能及高压测试 OK。

6.2. MTBF/平均失效时间

The MTBF of power supply shall be over than 50,000Hours @ 25°C, full load & 115Vac/230Vac input .

平均间隔故障时间: 在 25°C, 115Vac/230Vac 额定输入条件下, 至少工作 50,000 小时。

6.3. E-caps lifetime/电容寿命

The E-caps used in this PSU must be with lifetime of 3 years@25°C @ 115Vac/60Hz and 230Vac/50Hz Input.

25°C 下, 在100% 负载和115Vac/60Hz and 230Vac/50Hz 输入条件, 电解电容寿命必须有3年。

7. EMI/EMS Standards/EMI/EMS 标准

7.1. EMI Standards/EMI 标准

FCC Part15

7.2. EMS Standards/EMS 标准

7-2-1 EN 61000-4-2,electrostatic discharge(ESD) requirement/静电抗扰度要求

Discharge characteristic/静电规格	Test level/测试条件	judgment criteria/评定标准
Air discharge/空气放电	+/-8KV	B
Contact discharge/接触放电	+/-4KV	B

7-2-2 EN 61000-4-3,radiated electromagnetic field susceptibility(rs)/辐射骚扰场强

Test level/测试条件	judgment criteria/评定标准
3V/m (r.m.s)	A
80Mhz~6GHz ,80%AM(1KHz) sine-wave	

7-2-3 EN 61000-4-4,electric fast transients(burst) immunity requirement/电快速瞬变脉冲群

Coupling/测试端口	Test level/测试条件	judgment criteria/评定标准
AC-input/交流输入	+/-1KV	B
AC-input/交流输入	+/-2KV	B

7-2-4 EN 61000-4-5,surge capability requirement/浪涌抗扰度要求

Surge voltage/雷击电压	judgment criteria/评定标准
Common mode/共模 +/-2KV	A
Differential mode/差模 +/-2KV	

7-2-5 EN 61000-4-6, Induced radio frequency fields conducted disturbances immunity requirement/电源端子传导骚扰实验

Test level/测试条件	judgment criteria/评定标准
3V	A
0.15-80 MHz,80%AM(1KHz)	

7-2-6 Assessment criteria /评估标准

Acceptance criteria 可接受标准	Performance 性能
A	Agreed operational behavior within the specified limits 性能不允许变化; 如果性能会发生变化, 则变化的范围在产品规格书规定的范围内.
B	Time limited functional diminishment or malfunction during the tests is permitted. The function is self-reactivated by the unit following completion of the tests. 设备在测试过程中, 性能降低允许在产品规格书要求范围内, 干扰消除后, 设备能恢复正常, 不允许出现复位和任何方式的人工干预.
C	Malfunction is permitted .The function can be reactivated either by reconnection to the mains or by operator intervention. 在测试过程中, 设备允许出现业务中断, 测试完毕后允许自行恢复或者人工干预恢复(包括硬件上干预); 测试中只允许初级防护器件损坏, 并且更换损坏的初级防护器件后, 设备能恢复正常

8. Safety Standards/安规标准

8.1. Dielectric Strength(Hi-pot)/介电耐压强度(高压)

Primary to Secondary: 3000Vac /10mA max. / 60S (when safety testing)

初级对次级: **3000Vac / 10mA max. / 60 秒** (安规试验)

Primary to Secondary: 3300Vac /5mA max. / 3S (when production)

初级对次级:**3300Vac / 5mA max. /3S**(生产作业)

8.2. Leakage Current/漏电流

0.25mA max. at 264Vac / 60Hz

8.3. Insulation Resistance/绝缘阻抗


100MΩ min. at primary to secondary add 500Vdc test voltage.

在初级与次级之间加载测试电压 **500V** 测试, 绝缘阻抗最小 **100MΩ**.

8.4. Regulatory Standards/安规标准

Type/安规	Country/国家	Standard/标准	State/状况	Note/备注
UL	USA	UL62368-1	APPROVAL	

9. Mechanical Outline Drawing/外观示意图

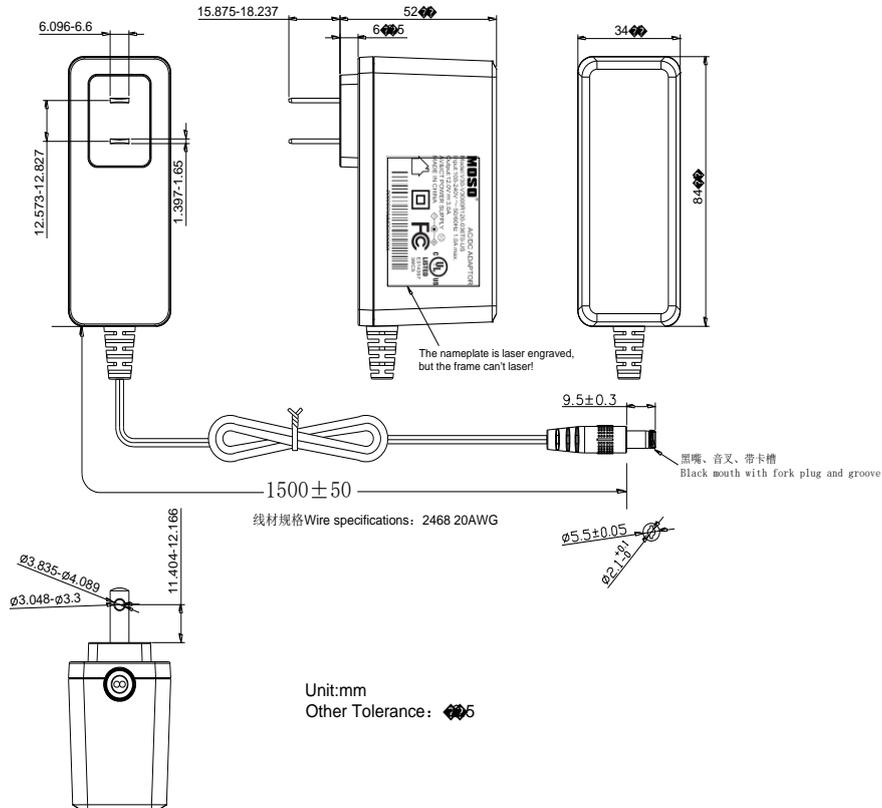


外壳材质: ■PC 耐温: 120°C.

□PC+ABS 耐温: 95°C.

备注: 1)PC 材质符合球压测试要求;

2)外壳与线材为黑色;

10. I/O Marking Drawing/铭牌示意图

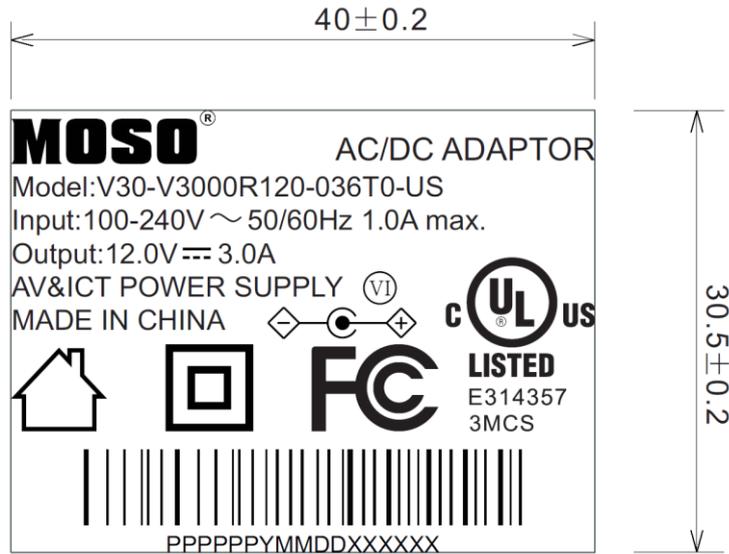


Remark:

1. Above label is laser engraved.
2. The dimension of double insulation mark can NOT less than 5mm.




- product code(产品编码:实际S编码后六位, 如SD301-U0, 取D301U0)
- producing year(产品实际生产年份,年份最后一位, 如2024年, 取4)
- producing month(产品实际生产月份, 如11月, 取11)
- producing date(产品实际生产日期, 如12日, 取12)
- product listing number(产品序列号, 000001-999999)

11. Package Drawing/包装示意图




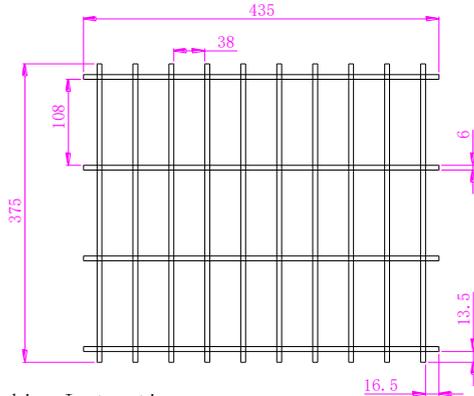


Packing Instruction:

- I. the packing product
put in the partitioning card groove, 27PCS/floor,
4 floors in all, 108PCS/box
such as: 27pcs/floor*4floor=108 PCS/box
- II. the usage of the packing materials:
 1. the usage of the ten partitioning card 435*375*75:4PCS
 2. the usage of the flat 435*375:5PCS
 3. The usage of the bag: 108PCS
 4. carton box 450*390*335: 1PCS
- III. Pallet stack instruction:
 1. Pallet size is: L1200*W950*H135mm
 2. per floor set 6pcs
 3. stack per 3floor*6pcs carton
total 18 pcs carton

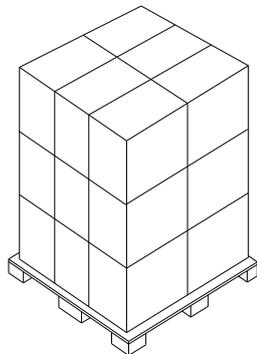

The pallet stack drawing

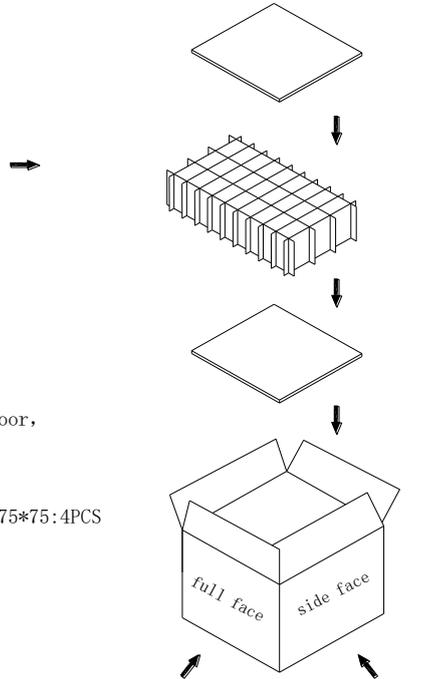

The product will be packed in the carton box and the box will be sealed by the sticker

- The requirement of PE bag packing: PE bag without sealing by adhesive tape.
 PE bag with sealing by adhesive tape
 Other requirement.

Remark: If the customer has not chose the PE bag packing way,
we will use the PE bag without sealing by adhesive tape.