

参考规格书

SPECIFICATION FOR REFERENCE

CUSTOMER: 客 户:	
CUSTOMER P.N.: 客户料号:	
MODEL NO.: 产品型号:	A30-ZA320R190-260A0-E
PRODUCT NO.: 产品编号:	SDXXX-E0
SAMPLE DATE: 送样日期:	2025-05-11

CUSTOMER AUTHORIZED SIGNATURE 客户承认签核		

Please return to us one copy of "SPECIFICATION FOR APPROVAL"
with you approved signature.

客户确认签字，盖章后请回传一份承认书给我司。

**ADD: MOSO Industrial Park, Nanshan District, Shenzhen, Guangdong
518108, P. R. China**

地址:深圳市南山区茂硕科技园

TEL: 86-755-27657000 27657555

P.C.: 518108

FAX: 86-755-27657908

E-mail:moso@mosopower.com

<http://www.mosopower.com>

MANUFACTURER AUTOGRAPH 制造商签名			
Reviser 修订	Confirm 确认	Checked 审查	Approval 批准

**** Table Of Content/目录 ****

1.	SCOPE.....	4
1.1.	Description /类型.....	4
1.2.	Green Requirements/环保要求.....	4
1.3.	Energy Efficiency Requirements/能效要求.....	4
2.	Input Characteristics/输入特性.....	5
2.1.	Input Voltage & Frequency/输入电压与频率.....	5
2.2.	Input AC Current/AC 输入电流.....	5
2.3.	Inrush Current (cold start)/浪涌电流(冷启动).....	5
2.4.	Averaged Efficiency/平均效率.....	5
2.5.	Energy Consumption /空载功耗.....	5
2.6.	Power Factor /功率因数.....	5
3.	Output Characteristics/输出特性.....	5
3.1.	Static Output Characteristics <Vo & R+N>/静态输出特性.....	5
3.2.	Line/ Load Regulation/线性/负载调整率.....	6
3.3.	Turn - on Delay Time/开机延迟时间.....	6
3.4.	Hold-up Time/关机维持时间.....	6
3.5.	Rise Time/上升时间.....	6
3.6.	Output Overshoot / Undershoot/输出过冲/欠冲.....	6
3.7.	Output Load Transient Response/输出负载瞬态响应.....	6
3.8.	Capacitance Load/容性负载.....	6
3.9.	Peak load current/峰值负载电流。.....	7
4.	Protection Requirements/保护要求.....	7
4.1.	Over Current Protection/过流保护.....	7
4.2.	Short Circuit Protection/短路保护.....	7
4.3.	Over Voltage Protection/过压保护.....	7
5.	Environment Requirements/环境要求.....	7
5.1.	Operating Temperature and Relative Humidity/操作温/湿度要求.....	7
5.2.	Storage Temperature and Relative Humidity/存储温/湿度要求.....	7
5.3.	Vibration/振动.....	8
5.4.	Drop in/跌落.....	8
6.	Reliability Requirements/可靠性要求.....	8
6.1.	Burn-in/煲机.....	8

6.2.	MTBF/平均失效时间	8
6.3.	E-caps lifetime/电容寿命	8
7.	EMI/EMS Standards/EMI/EMS 标准	8
7.1.	EMI Standards/EMI 标准	8
7.2.	EMS Standards/EMS 标准	8
8.	Safety Standards/安规标准	10
8.1.	Dielectric Strength(Hi-pot)/介电耐压强度(高压).....	10
8.2.	Leakage Current/漏电流	10
8.3.	Insulation Resistance/绝缘阻抗	10
8.4.	Earthing Resistance/接地阻抗测试	10
8.5.	Regulatory Standards/安规标准	10
9.	Mechanical Outline Drawing/外观示意图	11
10.	DC Cord Drawing/DC 线示意图	12
11.	I/O Marking Drawing/铭牌示意图	13
12.	Package Drawing/包装示意图	14

1. SCOPE

The document detail the electrical, mechanical and environmental specifications of a SMPS, the power supply provide 250.8W continuous output power.

资料详细描述了一款 250.8W (连续输出功率)开关电源的电气性,结构性及环境等要求.

The power supply shall meet the HSF requirement.

此款电源符合 HSF 要求.

1.1. Description /类型

- SMPS Adaptor(Wall mount)/插墙式适配器 SMPS Adaptor(Desk-top)/桌面型适配器
 Open Frame/开放式结构 SMPS Unit (With Case)/带铁壳型
 Others/其他

1.2. Green Requirements/环保要求

- RoHS:2011/65/EU & (EU) 2015/863;
 REACH:1907/2006/EC;
 Halogen-free:IEC 61249-2-21;
 CA Prop 65;
 POPs:(EU)2023/1608;
 PAHs: 2005/69/EC;
 Packaging Directive:94/62/EC;
 US EPA Toxic Substances Control Act (TSCA);
 MOSO Environmental standards: WI-QM006-G;
 Others

1.3. Energy Efficiency Requirements/能效要求

No.	Country/国家地区	Energy efficiency abbreviation/能效简称	Whether it meets the requirements/是否符合(YES/是 <input checked="" type="checkbox"/> , NO/否 <input type="checkbox"/>)
1	USA/美国	DoE VI	<input checked="" type="checkbox"/>
2		CEC	<input checked="" type="checkbox"/>
3	Canada/加拿大	NRCan	<input checked="" type="checkbox"/>
4	Australia/New Zealand/ 澳大利亚/新西兰	GEMS	<input checked="" type="checkbox"/>
5	Europe/欧盟	Erp VI	<input type="checkbox"/>
6		CoC V5 Tier 2	<input type="checkbox"/>
7	South Korea/韩国	KMEPS	<input type="checkbox"/>
8	Mexico/墨西哥	MEPS	<input type="checkbox"/>
9	Byelorussia/白俄罗斯	MEPS	<input type="checkbox"/>

2. Input Characteristics/输入特性

2.1. Input Voltage & Frequency/输入电压与频率

The range of input voltage is from 90Vac to 264Vac single phase.

输入电压范围: 从 **90Vac** 到 **264Vac**, 单相输入.

	Minimum/最小	Nominal/额定值	Maximum/最大
Input Voltage/输入电压	90Vac	100 Vac~ 240 Vac	264Vac
Input Frequency/输入频率	47 Hz	60 Hz/ 50Hz	63Hz

2.2. Input AC Current/AC 输入电流

5.0-2.5A max. @ 100-240Vac input & Full load.

输入电压 **100-240Vac** 满载时, 输入电流不超过 **5.0-2.5A**。

2.3. Inrush Current (cold start)/浪涌电流(冷启动)

The energy of inrush current should not be over the I²T of fuse & bridge diodes.

冷启动时, 浪涌能量不能超过整流桥和保险丝的 I²T, 且不能有损坏。

2.4. Averaged Efficiency/平均效率

88% min. @ 115Vac/60Hz, 230Vac/50Hz input (@25%, 50%, 75% and 100% of max load)

输入电压 **115Vac/60Hz, 230V/50Hz** 时, **25%、50%、75%和 100%**载时的平均效率不低于 **88%**

2.5. Energy Consumption /空载功耗

No load Consumption ≤0.21W(115Vac/60Hz, 230Vac/50Hz).

在额定输入 **115Vac/60Hz, 230Vac/50Hz** 时, 空载功耗 ≤**0.21W**。

2.6. Power Factor /功率因数

The PF should not be lower than 0.9 at 115/230Vac & full load.

115Vac/230Vac & 满载时, 功率因数不低于 **0.9**


3. Output Characteristics/输出特性

3.1. Static Output Characteristics <Vo & R+N>/静态输出特性

Output	Rated Load/额定负载		Output Range	R+N	Remark
Rate	Min. Load	Rate.Load	输出电压范围	纹波与噪声	备注
+19V	0.0A	13.2A	18.05V~ 19.95V	250mVp-p	100-240V

Ripple & Noise: Measurement is done by 20MHz bandwidth oscilloscope and the output paralleled a 0.1uF ceramic capacitor and a 10uF electrolytic capacitor. (test under the condition of rated input and rated output).

纹波与噪声: 量测时示波器选用 **20MHz** 带宽限制, 输出端要并联一颗 **0.1uF** 的陶瓷电容和一颗 **10uF** 的电解电容. (在额定输入及输出的条件下检测).

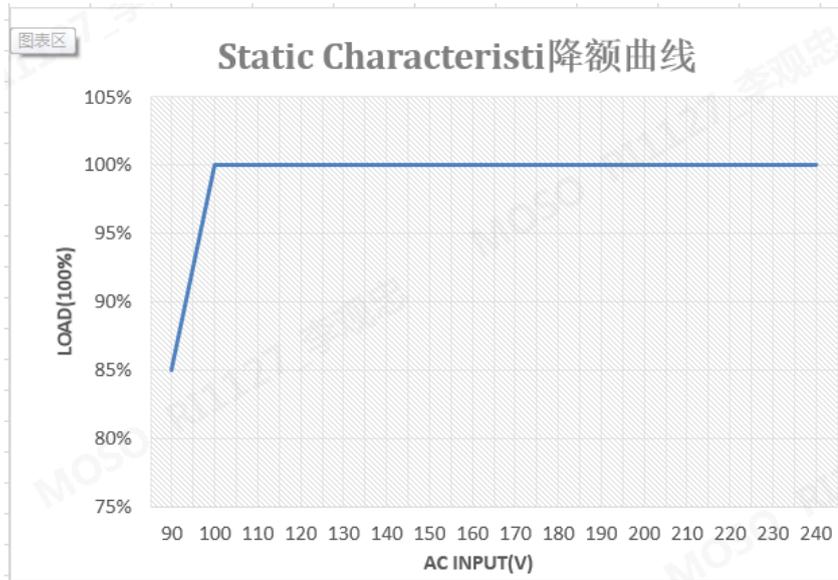

3.2. Line/ Load Regulation/线性/负载调整率

Output	Load Condition/负载条件		Line Regulation	Load Regulation	Remark
Rate	Min. Load	Rate.Load	线性调整率	负载调整率	备注
+19V	0.0A	13.2A	± 1%	± 5%	

3.3. Turn - on Delay Time/开机延迟时间

3S max. @ 100-240Vac input & Full load.

输入电压 100-240Vac 满载时, 开机延迟时间不超过 3S。

3.4. Hold-up Time/关机维持时间

5mS min. @ Full load & 115Vac/60Hz input turn off at the worst case.

输入电压 115Vac/60Hz 满载时, 关机时间最差情况不小于 5 毫秒。

10mS min. @ Full load & 230Vac/50Hz input turn off at the worst case.

输入电压 230Vac/50Hz 满载时, 关机时间最差情况不小于 10 毫秒。

3.5. Rise Time/上升时间

100mS max. @ Rated load

额定负载时, 上升时间不超过 100 毫秒。

3.6. Output Overshoot / Undershoot/输出过冲/欠冲

10 % max. When the power on or off, when it is the full input voltage and full load.

开关机时, 输出过冲/欠冲均不大于 10%。

3.7. Output Load Transient Response/输出负载瞬态响应

Output voltage is within 18.05~19.95V while the load step is from 20% to 80% of max load, R/S: 0.5A/uS, frequency: 100Hz and 8mS duration at 80% of max load.

输出电压在 18.05~19.95V 之间, 负载变化: 从最大载的 20%到 80%, 斜率: 0.5A/uS,

频率: 100Hz, 80% 负载持续时间为 8mS。

3.8. Capacitance Load/容性负载

While input 100~240Vac and capacitance load is 1000uF, the adapter can turn on normally and the output is in the rated range.

在输入 100~240Vac, 1000uF 容性负载条件下, 适配器能正常开机。并且输出电压范围在额定范围下。

3.9 Peak load current/峰值负载电流。

Value Load current 18A/10mS

峰值负载电流 18A/10mS

4. Protection Requirements/保护要求

4.1. Over Current Protection/过流保护

Over Current Point Limited/过流点限制: 127%~200% (100-240Vac)

The output shall hiccup when the over current applied to the output rail, and shall be auto-recovery when the fault condition is removed.

当过电流时,输出将进入打嗝模式,当过流情况解除后,产品将会自动恢复正常。

4.2. Short Circuit Protection/短路保护

The input power shall decrease when the output rail short, the power supply shall no damage, and shall be auto-recovery when the fault condition is removed.

当输出短路时,产品输入功率降低且不会损伤,当短路情况解除后,产品将会自动恢复正常。

4.3. Over Voltage Protection/过压保护

The power supply has to be protected against over voltage conditions. No damage allowed. The power supply must come back to nominal working without on/off powering after removal of the over voltage condition.

0A LAOD, OVP 38Vmax。

1/4 FULL LAOD, OVP 35Vmax。

2/4 FULL LAOD, OVP 30Vmax。

3/4 FULL LAOD, OVP 26Vmax。

FULL LAOD, OVP 24Vmax。

当过压保护时,产品输出功率不会损伤,当过压情况解除后,产品恢复正常。

负载为 0A LAOD 时, 过电压最大输出 38V。

负载为 1/4 FULL LAOD, 过电压最大输出 35V。

负载为 2/4 FULL LAOD, 过电压最大输出 30V。

负载为 3/4 FULL LAOD, 过电压最大输出 26V。

负载为 FULL LAOD, 过电压最大输出 24V。

5. Environment Requirements/环境要求

5.1. Operating Temperature and Relative Humidity/操作温/湿度要求

0°C to +40°C

10%RH to 90%RH

5.2. Storage Temperature and Relative Humidity/存储温/湿度要求

-40°C to +80°C

5%RH to 95%RH non-condensing @ Sea level shall be low 5,000 meters/低于 5,000 米。

5.3. Vibration/振动

10 to 300Hz sweep at a constant acceleration of 1.0G(Breadth: 3.5mm) for 1Hour for each of the perpendicular axes X, Y, Z.

扫描频率: **10 to 300Hz**, 加速度: **1.0G(位移: 3.5mm)**, X, Y, Z 三垂直坐标轴向各振动 1 小时。

5.4. Drop in/跌落

6 Surfaces each once, Height to be 1m, The floor is wooden.

木板, 6 面共 6 次, 1 米高度。

6. Reliability Requirements/可靠性要求

6.1. Burn-in/煲机

The power supply shall be burn-in for 2 Hours under normal input and 100% rated load at 40°C± 5°C, the electric performance and Hi-Pot test must be OK.

When the temperature test under the rated load of 40°C, the temperature of the parts does not need to be derated. Meet safety requirements.

电源应在正常输入和 40°C ± 5°C 的 100% 额定负载下老化 2 小时, 电性能和 Hi-Pot 测试必须正常。
40°C 额定负载下温升, 零件温度不做降额要求。符合安规要求。

6.2. MTBF/平均失效时间

The MTBF of power supply shall be over than 50,000 Hours @ 25°C 100% Load, (100-240VAC).

平均间隔故障时间: 在 25°C, 额定输入与 100% 负载条件下, 至少工作 50,000 小时。(100-240VAC)

6.3. E-caps lifetime/电容寿命

The E-caps used in this PSU must be with lifetime of 20,000 Hours @ 25°C@ 90Vac/60Hz ~264 Vac /50Hz input@ Full load.

在 25°C 环境下, 90Vac/60Hz~264Vac/50Hz 输入电压, 满负载, 电容寿命至少达 20,000 小时。

7. EMI/EMS Standards/EMI/EMS 标准

7.1. EMI Standards/EMI 标准

EMI 中 RE&CE CLASS B 要求, 且研发阶段单板裕量-6db, 量产阶段-4db 裕量。

(可读点)

GB/T9254 GB17625.1
EN55032 EN55035
FCC Part15
CNS 15936

7.2. EMS Standards/EMS 标准

7-2-1 EN 61000-4-2,electrostatic discharge(ESD) requirement/静电抗扰度要求

Discharge characteristic/静电规格	Test level/测试条件	Test criteria/测试标准
Air discharge/空气放电	+/- 15KV	A
Contact discharge/接触放电	+/- 8KV	A

7-2-2 EN 61000-4-3, radiated electromagnetic field susceptibility(rs)/辐射骚扰场强

Test level/测试条件	Test criteria/测试标准
10V/m (r.m.s)	B
30-1000MHz,80%AM(1KHz) sine-wave	

7-2-3 EN 61000-4-4, electric fast transients(burst) immunity requirement/电快速瞬变脉冲群

Coupling/测试端口	Test level/测试条件	Test criteria/测试标准
AC-input/交流输入	0.5KV	B
AC-input/交流输入	1KV	B

7-2-4 EN 61000-4-5, surge capability requirement/浪涌抗扰度要求

Surge voltage/雷击电压	Test criteria/测试标准
Common mode/共模 +/- 2KV	B
Differential mode/差模 +/-1KV	

7-2-5 EN 61000-4-6, Induced radio frequency fields conducted disturbances immunity requirement/电源端子传导骚扰实验

Test level/测试条件	Test criteria/测试标准
3V	B
0.15-30 MHz,80%AM(1KHz)	

7-2-6 Assessment criteria /评估标准

Acceptance criteria 可接受标准	Performance 性能
A	Agreed operational behavior within the specified limits 性能不允许变化; 如果性能会发生变化, 则变化的范围在产品规格书规定的范围内.
B	Time limited functional diminishment or malfunction during the tests is permitted. The function is self-reactivated by the unit following completion of the tests. 设备在测试过程中,性能降低允许在产品规格书要求范围内,干扰消除后,设备能恢复正常,不允许出现复位和任何方式的人工干预.
C	Malfunction is permitted .The function can be reactivated either by reconnection to the mains or by operator intervention. 在测试过程中,设备允许出现业务中断,测试完毕后允许自行恢复或者人工干预恢复(包括硬件上干预); 测试中只允许初级防护器件损坏,并且更换损坏的初级防护器件后,设备能恢复正常

8. Safety Standards/安规标准

8.1. Dielectric Strength(Hi-pot)/介电耐压强度(高压)

Primary to Secondary: 1500Vac / 10mA max. / 60 second.

初级对次级: **1500Vac / 10mA max./ 60 秒(安规试验)** .

Primary to Secondary: 1800Vac / 5mA max. / 3 S.

初级对次级: **1800Vac / 5mA max. / 3S(生产作业)**.

8.2. Leakage Current/漏电流

0.5mA max. at 264Vac / 60Hz

8.3. Insulation Resistance/绝缘阻抗

100MΩ min. at primary to secondary add 500Vdc test voltage.

在初级与次级间加 **500Vdc** 进行测试


8.4. Earthing Resistance/接地阻抗测试

Earthing Resistance: <0.1 Ω at 12VDC/25A/1S.

8.5. Regulatory Standards/安规标准



Type/安规	Country/国家	Standard/标准	State/状况	
CCC	China	GB4943.1	APPROVAL	
CE	Europe	EN62368-1	APPROVAL	
UKCA	UK	EN62368-1	APPROVAL	
BSMI	Taiwan China	CNS15598-1	APPROVAL	
PSB	Singapore	IEC62368-1	APPROVAL	
PSE	Japan	J62368-1	APPROVAL	
RCM	Australia	AS/NZS62368.1	APPROVAL	
BIS	India	IS13252(Part1)	APPROVAL	

9. Mechanical Outline Drawing/外观示意图

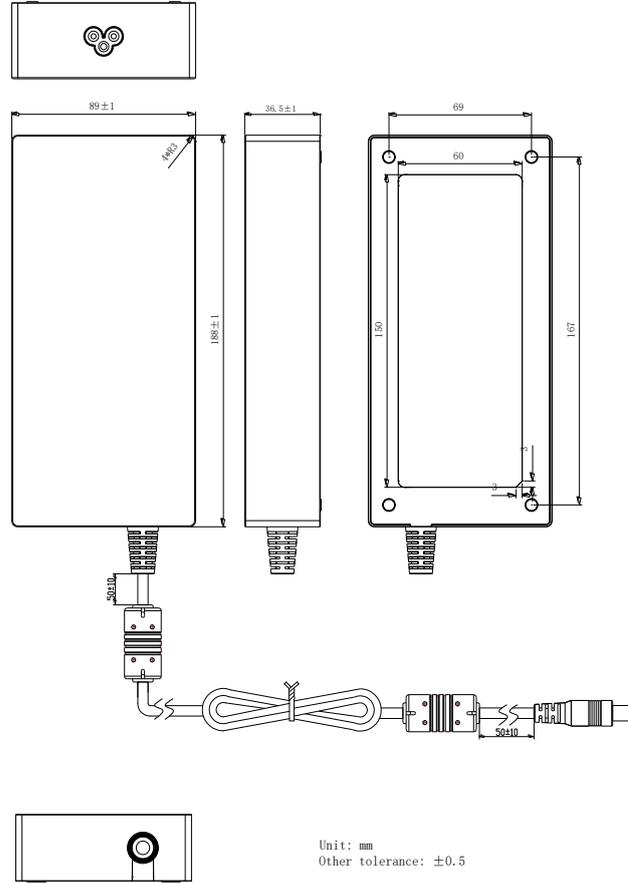


- 外壳材质: PC 耐温: 120°C
 PC+ABS 耐温: 95°C
备注: 1)PC 材质符合球压测试要求
2)外壳与线材为黑色 (1101M)

11. I/O Marking Drawing/铭牌示意图

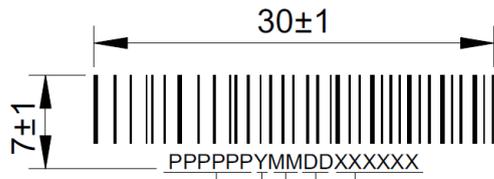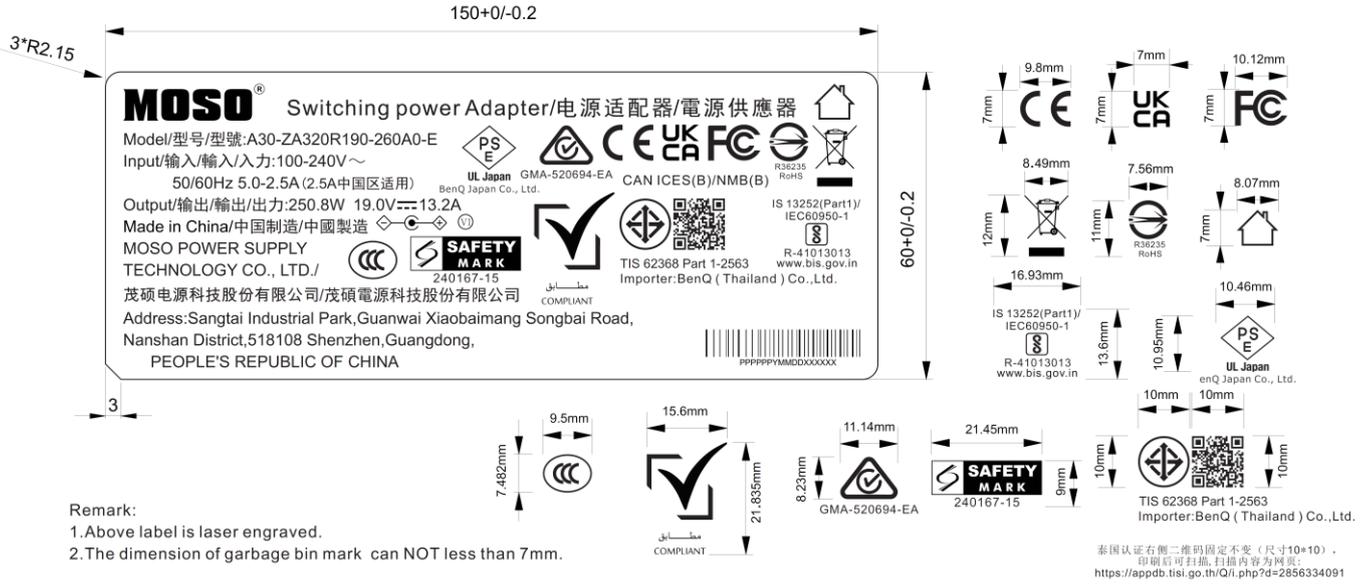

product code(产品编码:实际S编码后六位, 如SC927-E0,取C927E0)
 producing year(产品实际生产年份,年份最后一位, 如2024年, 取4)
 producing month(产品实际生产月份, 如11月, 取11)
 producing date(产品实际生产日期, 如12日, 取12)
 product listing number(产品序列号,000001-999999)

12. Package Drawing/包装示意图

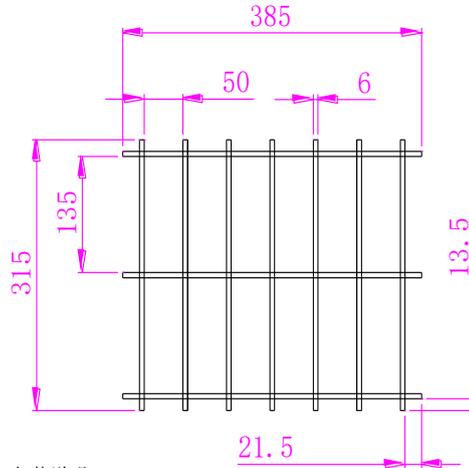

包装说明:

一、将每个产品直接装入PE袋中,再装入刀卡中,每层装12PCS,共装1层,每箱装12PCS




即:12pcs/层*1层=12PCS/箱

二、包装材料使用说明为:



- 1、PE袋300*160*:12PCS
- 2、刀卡385*315*240: 1PCS
- 3、平板385*315MM:2PCS
- 5、纸箱L400*W330*H275MM: 1 PCS

三、栈板堆放说明为:

- 1、栈板尺寸为: L1000*W800*H100mm
- 2、每层放2行*3列=6箱
- 3、竖直堆放4层*6箱共24箱

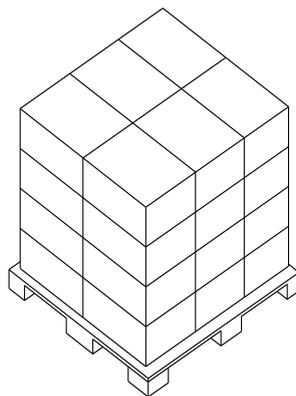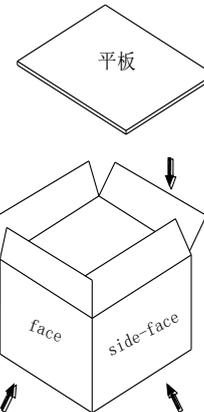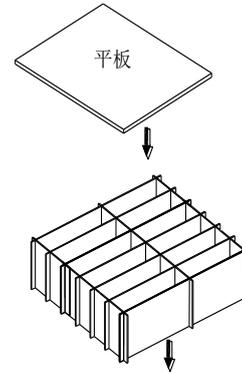

栈板堆放示意图

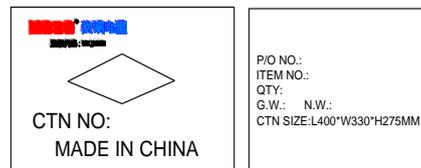

封箱示意图

PE 袋包装要求: PE 袋不用胶带封口;

PE 袋用胶带封口;

其它要求;

备注:若客户未进行选择 PE 袋包装要求或备注时,
我司默认采用 PE 袋不用胶带封口包装方式