

参考规格书

SPECIFICATION FOR REFERENCE

CUSTOMER/客户: _____

CUSTOMER P.N./客户物料号: _____

MODEL NO./产品型号: MS-Z5790-R190-110D0-E

PRODUCT NO./产品编号: SCXXX-E0/XXXXXXXX

SAMPLE DATE/送样日期: 2024-07-11

CUSTOMER AUTHORIZED SIGNATURE/客户承认签核		

Please return to us one copy of "SPECIFICATION FOR APPROVAL"
with you approved signature./客户确认签字,
盖章后请回传一份承认书给我司.

ADD: MOSO Industrial Park, Nanshan District, Shenzhen, Guangdong
518108, P. R. China

地址: 深圳市南山区茂硕科技园

TEL: 86-755-27657000 27657555

P.C.: 518108

FAX: 86-755-27657908

E-mail: moso@mosopower.com

<http://www.mosopower.com>

拟 制:	项目工程师:	安规工程师:	批 准:

**** Table Of Content/目录 ****

1. SCOPE	4
1.1. Description.....	4
2. Input Characteristics/输入特性	4
2.1. Input Voltage & Frequency/输入电压与频率	4
2.2. Input AC Current/AC 输入电流	4
2.3. Inrush Current (cold start)/浪涌电流(冷启动).....	4
2.4. Averaged Efficiency/平均效率	4
2.5. Energy Consumption /空载功耗	4
2.6. Power Factor /功率因数.....	4
3. Output Characteristics/输出特性.....	4
3.1. Static Output Characteristics <Vo & R+N>/静态输出特性	4
3.2. Line/ Load Regulation/线性/负载调整率.....	5
3.3. Turn - on Delay Time/开机延迟时间	5
3.4. Hold-up Time/关机维持时间.....	5
3.5. Rise Time/上升时间	5
3.6. Fall Time/下降时间	5
3.7. Output Overshoot / Undershoot/输出过冲/欠冲	5
3.8. Output Load Transient Response/输出负载瞬态响应	5
4. Protection Requirements/保护要求	5
4.1. Over Current Protection/过流保护	5
4.2. Short Circuit Protection/短路保护	5
4.3. Over Voltage Protection/过压保护	6
5. Environment Requirements/环境要求	6
5.1. Operating Temperature and Relative Humidity/操作温/湿度要求	6
5.2. Storage Temperature and Relative Humidity/存储温/湿度要求.....	6
5.3. Vibration/振动	6
5.4. Drop Test/跌落	6
6. Reliability Requirements/可靠性要求	6
6.1. Burn-in/煲机	6
6.2. MTBF/平均失效时间	6
6.3. E-caps lifetime/电容寿命	6
7. EMI/EMS Standards/EMI/EMS 标准.....	7
7.1. EMI Standards/EMI 标准	7
7.2. EMS Standards/EMS 标准	7
8. Safety Standards/安规标准	8
8.1. Dielectric Strength(Hi-pot)/介电耐压强度(高压).....	8
8.2. Leakage Current/漏电流	8

8.3. Insulation Resistance/绝缘阻抗	8
8.4. Earthing Resistance/接地阻抗测试.....	8
8.5. Regulatory Standards/安规标准	8
9. Mechanical Outline Drawing/外观示意图.....	9
10. I/O Marking Drawing/铭牌示意图.....	10
11. Package Drawing/包装示意图.....	11

1. SCOPE

The document detail the electrical, mechanical and environmental specifications of a SMPS, the power supply provide 110.01W continuous output power.

资料详细描述了一款 110.01W (连续输出功率)开关电源的电气性,结构性及环境等要求.

The power supply shall meet the **HSF** requirement.

此款电源符合 **HSF** 要求.

1.1. Description

- SMPS Adaptor(Wall mount)/插墙式适配器 SMPS Adaptor(Desk-top)/桌面型适配器
 Open Frame/开放式结构 SMPS Unit (With Case)/带铁壳型
 Others/其他

2. Input Characteristics/输入特性

2.1. Input Voltage & Frequency/输入电压与频率

The range of input voltage is from 90Vac to 264Vac single phase.

输入电压范围: 从 **90Vac** 到 **264Vac**, 单相输入.

	Minimum/最小	Nominal/额定值	Maximum/最大
Input Voltage/输入电压	90Vac	100 Vac~ 240 Vac	264Vac
Input Frequency/输入频率	47 Hz	60 Hz/ 50Hz	63Hz

2.2. Input AC Current/AC 输入电流

1.6A max. @ 100-240Vac input & Full load.

输入电压 **100-240Vac** 满载时, 输入电流不超过 **1.6A**。

2.3. Inrush Current (cold start)/浪涌电流(冷启动)

The energy of inrush current should not be over the I²T of fuse & bridge diodes.

冷启动时, 浪涌能量不能超过整流桥和保险丝的 I²T, 且不能有损坏.

2.4. Averaged Efficiency/平均效率

88% min. @ 115Vac/60Hz,230Vac/50Hz input (@25%, 50%, 75% and 100% of max load)

输入电压 **115Vac/60Hz,230Vac/50Hz** 时, **25%、50%、75%和 100%**载时的平均效率不低于 **88%**

2.5. Energy Consumption /空载功耗

No load Consumption ≤0.21W(115Vac/60Hz,230Vac/50Hz).

在额定输入 **115Vac/60Hz,230Vac/50Hz** 时,空载功耗≤**0.21W**。

2.6. Power Factor /功率因数

The PF should not be lower than 0.9 at 115/230Vac & full load.

3. Output Characteristics/输出特性

3.1. Static Output Characteristics <Vo & R+N>/静态输出特性

Output	Rated Load/额定负载		Output Range	R+N	Remark
Rate	Min. Load	Rate.Load	输出电压范围	纹波与噪声	备注
+19.5V	0.0A	5.79A	18.53~20.47V	190mVp-p	115-230V

Ripple & Noise: Measurement is done by 20MHz bandwidth oscilloscope and the output paralleled a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor. (test under the condition of rated input and rated output).

纹波与噪声: 量测时示波器选用 **20MHz** 带宽限制,输出端要并联一颗 **0.1uF** 的陶瓷电容和一颗 **47uF** 的电解电容. (在额定输入及输出的条件下检测).

3.2. Line/ Load Regulation/线性/负载调整率

Output	Load Condition/负载条件		Line Regulation	Load Regulation	Remark
Rate	Min. Load	Rate.Load	线性调整率	负载调整率	备注
+19.5V	0.0A	5.79A	± 3%	± 5 %	

3.3. Turn - on Delay Time/开机延迟时间

3S max. @115Vac to 230Vac input & Full load.

输入电压 **115Vac to 230Vac** 满载时, 开机延迟时间不超过 **3S**。

3.4. Hold-up Time/关机维持时间

10mS min. @ Full load &115Vac/60Hz,230Vac/50Hz input turn off at worst case

输入电压 **115Vac/60Hz, 230Vac/50Hz** 满载时, 关机时间最差情况不小于 **10 毫秒**。

3.5. Rise Time/上升时间

50 mS max. @ Rated load.

额定负载时, 上升时间不超过 **50 毫秒**。

3.6. Fall Time/下降时间

30 mS max. @ Full load.

满载时, 下降时间不超过 **30 毫秒**。

3.7. Output Overshoot / Undershoot/输出过冲/欠冲

10% max. When the power on or off, when it is the full input voltage and full load.

开关机时, 输出过冲/欠冲均不大于 **10%**。

3.8. Output Load Transient Response/输出负载瞬态响应

Output voltage within 17.1V~20.9V for load step from 25% to 50% to 25%,50% to 75% to 50% R/S: 0.25A/uS, Transient Response Recovery Time :200uS, Dynamic response overshoot 10%.

输出电压在 17.1V~20.9V 之间,负载变化: 从 **25% to 50% to 25%, 50% to 75% to 50%**斜率:**0.25A/uS**,动态响应恢复时间: **200uS**, 动态响应过冲**±10%**。

4. Protection Requirements/保护要求

4.1. Over Current Protection/过流保护

Over Current Point Limited/过流点限制: 10A Max(100-240Vac)

The output shall hiccup when the over current applied to the output rail, and shall be auto-recovery when the fault condition is removed.

当过电流时,输出将进入打嗝模式,当过流情况解除后,产品将会自动恢复正常。

4.2. Short Circuit Protection/短路保护

The input power shall decrease when the output rail short, the power supply shall no damage, and shall be auto-recovery when the fault condition is removed.

当输出短路时,产品输入功率降低且不会损伤,当短路情况解除后,产品将会自动恢复正常。

4.3. Over Voltage Protection/过压保护

When over-voltage protection, the product will not be damaged. When the over-voltage condition is removed, the product will restart and return to normal.

当过压保护时,产品不会损伤,当过压情况解除后,产品重启恢复正常。

5. Environment Requirements/环境要求

5.1. Operating Temperature and Relative Humidity/操作温/湿度要求

0°C to +40°C

5%RH to 90%RH

5.2. Storage Temperature and Relative Humidity/存储温/湿度要求

-20°C to +80°C

5%RH to 95%RH non-condensing @ Sea level shall be low 5,000 meters/低于 5,000 米。

5.3. Vibration/振动

10 to 300Hz sweep at a constant acceleration of 1.0G(Breadth: 3.5mm) for 1Hour for each of the perpendicular axes X, Y, Z.

扫描频率: **10 to 300Hz**, 加速度: **1.0G(位移: 3.5mm)**, X, Y, Z 三垂直坐标轴向各振动 1 小时。

5.4. Drop Test/跌落

Height: 1m; the product should be fell off on the hardwood with the thickness of 20mm.

Apply one time on all surfaces, totally 6 surfaces. The electric performance and Hi-Pot test must be OK after the drop tests.

跌落高度:1m, 并跌落到厚度为 20mm 的硬木上,6 个面, 每个面各跌落 1 次,在跌落后电气性能及高压测试 OK.

6. Reliability Requirements/可靠性要求

6.1. Burn-in/煲机

The power supply shall be burn-in for 2 Hours under normal input and 80% rated load at 35°C± 5°C , the electric performance and Hi-Pot test must be OK.

电源应在正常输入和 35°C± 5°C 的 80% 额定负载下老化 2 小时, 电性能和 Hi-Pot 测试必须正常。

6.2. MTBF/平均失效时间

The MTBF of power supply shall be over than 50,000 Hours @ 25°C 100%Load .

平均间隔故障时间: 在 25°C, 额定输入与 100%负载条件下, 至少工作 50,000 小时。

MTBF calculation done according Bellcore SR-332.

MTBF 计算根据是: SR-332。

6.3. E-caps lifetime/电容寿命

The E-caps used in this PSU must be with lifetime of 26,280H @ 25°C,80% load @ 115Vac/60Hz and 230Vac/50Hz input.

在 25 度环境下, 在 115Vac/60Hz、230Vac/50Hz 输入电压, 80%负载, 电容寿命至少达 26,280 小时。

7. EMI/EMS Standards/EMI/EMS 标准

7.1. EMI Standards/EMI 标准

FCC Part15
 EN55032 EN55035 GB/T9254 GB17625.1

7.2. EMS Standards/EMS 标准

7-2-1 EN 61000-4-2,electrostatic discharge(ESD) requirement/静电抗扰度要求

Discharge characteristic/静电规格	Test level/测试条件	Test criteria/测试标准
Air discharge/空气放电	+/- 15KV	B
Contact discharge/接触放电	+/- 8KV	B

7-2-2 EN 61000-4-3,radiated electromagnetic field susceptibility(rs)/辐射骚扰场强

Test level/测试条件	Test criteria/测试标准
10V/m (r.m.s)	A
30-1000MHz,80%AM(1KHz) sine-wave	

7-2-3 EN 61000-4-4,electric fast transients(burst) immunity requirement/电快速瞬变脉冲群

Coupling/测试端口	Test level/测试条件	Test criteria/测试标准
AC-input/交流输入	0.5KV	B
AC-input/交流输入	1KV	B

7-2-4 EN 61000-4-5,surge capability requirement/浪涌抗扰度要求

Surge voltage/雷击电压	Test criteria/测试标准
Common mode/共模 +/- 2KV	B
Differential mode/差模 +/-2KV	

7-2-5 EN 61000-4-6, Induced radio frequency fields conducted disturbances immunity requirement/电源端子传导骚扰实验

Test level/测试条件	Test criteria/测试标准
3V	A
0.15-30 MHz,80%AM(1KHz)	

7-2-6 Assessment criteria /评估标准

Acceptance criteria 可接受标准	Performance 性能
A	Agreed operational behavior within the specified limits 性能不允许变化; 如果性能会发生变化, 则变化的范围在产品规格书规定的范围内.
B	Time limited functional diminishment or malfunction during the tests is permitted. The function is self-reactivated by the unit following completion of the tests. 设备在测试过程中,性能降低允许在产品规格书要求范围内,干扰消除后,设备能恢复正常,不允许出现复位和任何方式的人工干预.
C	Malfunction is permitted .The function can be reactivated either by reconnection to the mains or by operator intervention. 在测试过程中, 设备允许出现业务中断, 测试完毕后允许自行恢复或者人工干预恢复(包括硬件上干预); 测试中只允许初级防护器件损坏, 并且更换损坏的初级防护器件后, 设备能恢复正常

8. Safety Standards/安规标准

8.1. Dielectric Strength(Hi-pot)/介电耐压强度(高压)

Primary to Secondary:1500Vac / 10mA max. / 60 second.

初级对次级: **1500Vac / 10mA max./ 60 秒(安规试验)** .

Primary to Secondary:1800Vac / 5mA max. / 3 S.

初级对次级: **1800Vac / 5mA max. / 3S(生产作业)**.

8.2. Leakage Current/漏电流

3.5mA max. at 264Vac / 60Hz.

8.3. Insulation Resistance/绝缘阻抗

100MΩ min. at primary to secondary add 500Vdc test voltage.

在初级与次级间加 **500Vdc** 进行测试


8.4. Earthing Resistance/接地阻抗测试

Earthing Resistance: <0.1 Ω at 12VDC/25A/1S.

8.5. Regulatory Standards/安规标准

Type/安规	Country/国家	Standard/标准	State/状况	Note/备注
UL	USA	UL62368-1	APPROVAL	
CCC	China	GB4943.1	APPROVAL	

9. Mechanical Outline Drawing/外观示意图

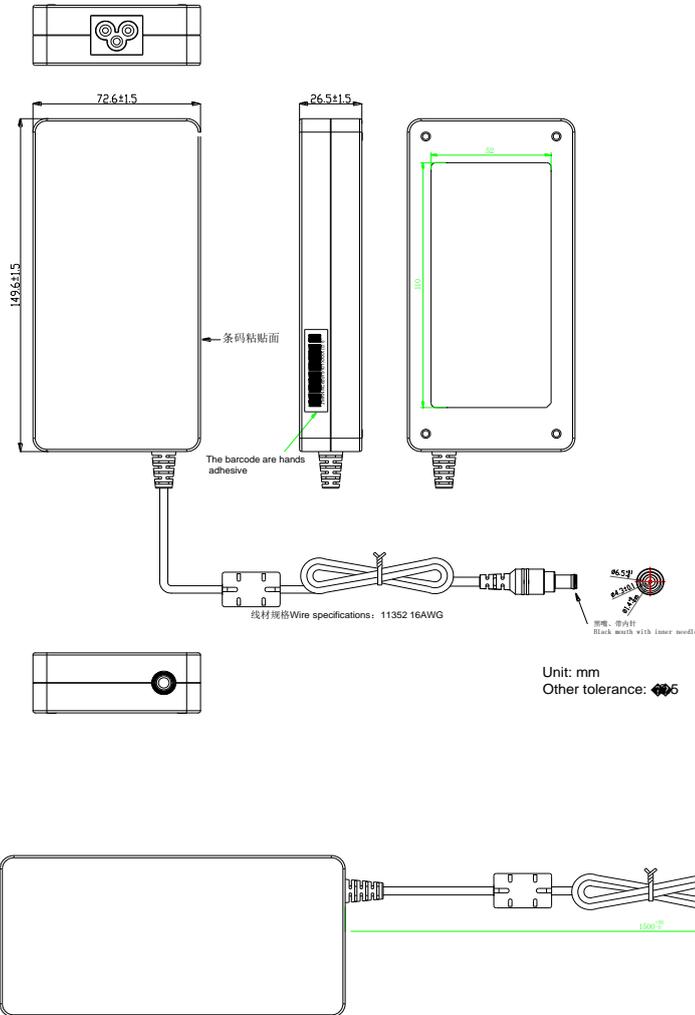


- 外壳材质: PC 耐温: 120°C
 PC+ABS 耐温: 95°C
 备注: 1) PC 材质符合球压测试要求
 2) 外壳为黑色。


10. I/O Marking Drawing/铭牌示意图

Remark:

1. Above label is laser engraved.
2. The height dimension of garbage bin mark can NOT less than 7mm.

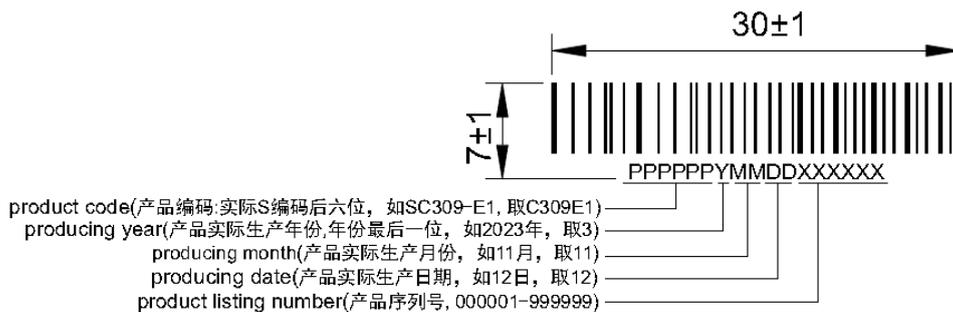

11. Package Drawing/包装示意图

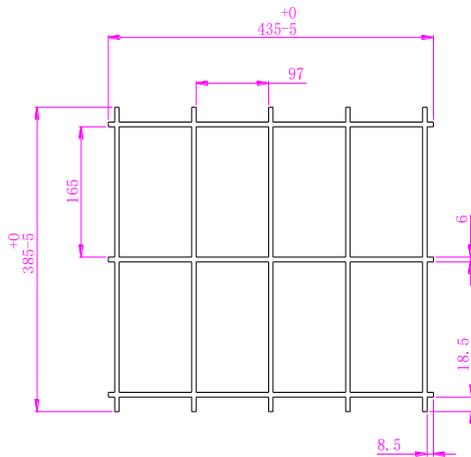


包装说明:




- 一、将产品每PCS装入PE袋中包好，再将包装的产品放入刀卡槽中，每层装8PCS，共装5层，每箱装40PCS
即：8pcs/层*5层=40PCS/箱
- 二、包装材料使用说明为：
 - 1、组合刀卡435*385用量：5PCS
 - 3、PE袋250*140MM用量：40PCS
 - 4、平卡435*375用量：6PCS
 - 6、纸箱450*390*335：1PCS

三、栈板堆放说明为:

- 1、栈板尺寸为：L1200*W950*H135mm
- 2、每层放2行*3列=6箱
- 3、竖直堆放4层*6箱共24箱

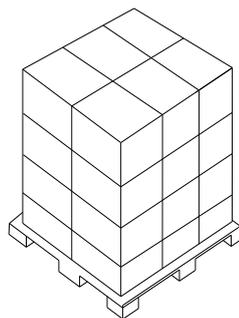


栈板堆放示意图

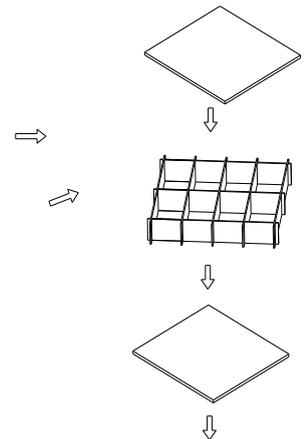

450*390*335MM

纸箱的外尺寸：450L*390W*335H

P/O NO.
ITEM NO.
QTY
G. W. : N. W. :
CTN SIZE:



产品装入包装箱用胶袋封箱,位置参考图中所示.

- 袋子包装要求: 袋子不用胶带封口;
 袋子用胶带封口;
 其它要求;

备注:若客户未进行选择袋子包装要求或备注时,
我司默认采用袋子不用胶带封口包装方式.