

参考规格书

SPECIFICATION FOR REFERENCE

CUSTOMER: 客 户:	平台
CUSTOMER P.N.: 客户料号:	
MODEL NO.: 产品型号:	K30-V1000R240-024AG0-CN
PRODUCT NO.: 产品编号:	
SAMPLE DATE: 送样日期:	2026-03-23

CUSTOMER AUTHORIZED SIGNATURE 客户承认签核		

Please return to us one copy of "SPECIFICATION FOR APPROVAL"
with you approved signature.

客户确认签字, 盖章后请回传一份承认书给我司。

**ADD: MOSO Industrial Park, Nanshan District, Shenzhen, Guangdong
518108, P. R. China**

地址:深圳市南山区茂硕科技园

TEL: 86-755-27657000 27657555

P.C.: 518108

FAX: 86-755-27657908

E-mail: moso@mosopower.com

<http://www.mosopower.com>

MANUFACTURER AUTOGRAPH 制造商签名			
Reviser 修订	Confirm 确认	Checked 审查	Approval 批准

**** Table Of Content/目录 ****

1.	SCOPE.....	4
1.1.	Description /类型.....	4
1.2.	Green Requirements/环保要求.....	4
2.	Input Characteristics/输入特性.....	4
2.1.	Input Voltage & Frequency/输入电压与频率.....	4
2.2.	Input AC Current/AC 输入电流.....	4
2.3.	Inrush Current (cold start)/浪涌电流(冷启动).....	4
2.4.	Average Efficiency 平均效率.....	4
2.5.	Energy Consumption /空载功耗.....	5
3.	Output Characteristics/输出特性.....	5
3.1.	Static Output Characteristics <Vo & R+N>/静态输出特性.....	5
3.2.	Line/ Load Regulation/线性/负载调整率.....	5
3.3.	Turn - on Delay Time/开机延迟时间.....	5
3.4.	Hold-up Time/关机维持时间.....	5
3.5.	Rise Time/上升时间.....	5
3.6.	Fall Time/下降时间.....	5
3.7.	Output Overshoot / Undershoot/输出过冲/欠冲.....	5
3.8.	Output Load Transient Response/输出负载瞬态响应.....	5
4.	Protection Requirements/保护要求.....	6
4.1.	Over Current Protection/过流保护.....	6
4.2.	Short Circuit Protection/短路保护.....	6
4.3.	Over Voltage Protection/过压保护.....	6
5.	Environment Requirements/环境要求.....	6
5.1.	Operating Temperature and Relative Humidity/操作温/湿度要求.....	6
5.2.	Storage Temperature and Relative Humidity/存储温/湿度要求.....	6
5.3.	Sea level 5,000 meters/海拔 5,000 米.....	6
5.4.	Vibration/振动.....	6
5.5.	Drop Test/跌落.....	6
6.	Reliability Requirements/可靠性要求.....	6
6.1.	Burn-in/煲机.....	6
6.2.	MTBF/平均故障时间.....	7
7.	EMI/EMS Standards/EMI/EMS 标准.....	7
7.1.	EMI Standards/EMI 标准.....	7
7.2.	EMS Standards/EMS 标准.....	7

8.	Safety Standards/安规标准	8
8.1.	Dielectric Strength(Hi-pot)/介电耐压强度(高压)	8
8.2.	Leakage Current/漏电流.....	8
8.3.	Insulation Resistance/绝缘阻抗	8
8.4.	Regulatory Standards/安规标准.....	8
9.	Mechanical Outline Drawing/外观示意图.....	9
10.	I/O Marking Drawing/铭牌示意图	10
11.	Package Drawing/包装示意图	11

1. SCOPE

The document detail the electrical, mechanical and environmental specifications of a SMPS, the power supply provide 24W continuous output power.

资料详细描述了一款 **24W(连续输出功率)**开关电源的电气性,结构性及环境等要求.

The power supply shall meet the HSF requirement.

此款电源符合 **HSF** 要求.

1.1. Description /类型

- SMPS Adaptor(Wall mount)/插墙式适配器 SMPS Adaptor(Desk-top)/桌面型适配器
 Open Frame/开放式结构 SMPS Unit (With Case)/带铁壳型
 Others/其他

1.2. Green Requirements/环保要求

- RoHS:2011/65/EU & (EU) 2015/863;
 REACH:1907/2006/EC;
 Halogen-free:IEC 61249-2-21;
 CA Prop 65;
 POPs:(EU)2023/1608;
 PAHs: 2005/69/EC;
 Packaging Directive:94/62/EC;
 US EPA Toxic Substances Control Act (TSCA);
 MOSO Environmental standards: WI-QM006-G;
 Others

2. Input Characteristics/输入特性

2.1. Input Voltage & Frequency/输入电压与频率

The range of input voltage is from 180Vac to 264Vac single phase.

输入电压范围: 从 **180Vac** 到 **264Vac**, 单相输入.

	Minimum/最小	Nominal/额定值	Maximum/最大
Input Voltage/输入电压	180Vac	200vac~240vac	264Vac
Input Frequency/输入频率	47Hz	60Hz/50Hz	63Hz

2.2. Input AC Current/AC 输入电流

0.8A max. @ 200-240Vac input & Full load.

输入电压 **200-240Vac** 满载时, 输入电流不超过 **0.8A**。

2.3. Inrush Current (cold start)/浪涌电流(冷启动)

No damage shall be presented at the cold start

冷启动时不能有损坏。

2.4. Average Efficiency 平均效率

86.20 % min. @230Vac input (@25%, 50%, 75% and 100% of max load);

输入电压 230V 时, 25%、50%、75%和 100%载时的平均效率不低于 86.20%.

2.5. Energy Consumption /空载功耗

No load consumption ≤ 0.21W(230Vac/50Hz).

输入电压 230Vac 时,空载功耗均小于 0.21W。

3. Output Characteristics/输出特性

3.1. Static Output Characteristics <Vo & R+N>/静态输出特性

Output Rate	Rated Load/额定负载		Output Range 输出电压范围	R+N 纹波与噪声	Remark 备注
	Min. Load	Max. Load			
+24V	0.0A	1A	22.8~25.2V	200mVp-p	200-240V

Ripple & Noise: Measurement is done by 20MHz bandwidth oscilloscope and the output paralleled a 0.1uF ceramic capacitor and a 10uF electrolytic capacitor. (test under the condition of rated input and rated output)

纹波与噪声: 量测时示波器选用 20MHz 带宽限制,输出端要并联一颗 0.1uF 的陶瓷电容和一颗 10uF 的电解电容. (在额定输入及输出的条件下检测)

3.2. Line/ Load Regulation/线性/负载调整率

Output Rate	Load Condition/负载条件		Line Regulation 线性调整率	Load Regulation 负载调整率	Remark 备注
	Min. Load	Max. Load			
+24V	0.0A	1A	± 3%	± 5%	

3.3. Turn - on Delay Time/开机延迟时间

3S max. @ 200Vac to 240Vac input & Full load/满载.

输入电压 200-240V 满载时, 开机延迟时间不超过 3S。

3.4. Hold-up Time/关机维持时间

20mS min. @ Full load & 230Vac/50Hz input turn off

输入电压 230Vac/50Hz 满载时, 关机时间不小于 20 毫秒。

3.5. Rise Time/上升时间

40mS max. @ Rated load.

额定负载时, 上升时间不超过 40 毫秒。

3.6. Fall Time/下降时间

30mS max. @ Rated load.

额定负载时, 下降时间不超过 30 毫秒。

3.7. Output Overshoot / Undershoot/输出过冲/欠冲

10% max. When the power on or off, when it is the full input voltage and full load.

开关机时, 输出过冲/欠冲均不大于 10%。

3.8. Output Load Transient Response/输出负载瞬态响应

Output voltage within 22.8V -25.2V for load step from 20% to 80%, R/S: 0.5A/uS, Frequency: 100Hz duration and 8mS at 80%.

输出电压在 22.8V-25.2V 之间,负载变化: 从 20%到 80%, 斜率 0.5A/uS, 频率: 在 80%负载 100Hz

持续 8 mS.

4. Protection Requirements/保护要求

4.1. Over Current Protection/过流保护

Over Current Point Limited/过流点限制: $1.8A > I > 1.2A$ (100-240Vac)

The output shall hiccup when the over currents applied to the output rail, and shall be self-recovery when the fault condition is removed.

当过电流时,输出将进入打嗝模式,当过流情况解除后,产品将会自动恢复正常。

4.2. Short Circuit Protection/短路保护

The input power shall decrease when the output rail short, the power supply shall no damage, and shall be self-recovery when the fault condition is removed.

当输出短路时,产品输入功率降低且不会损伤,当短路情况解除后,产品将会自动恢复正常。

4.3. Over Voltage Protection/过压保护

The power supply has to be protected against over voltage conditions. No damage allowed. The power supply must come back to nominal working without on/off powering after removal of the over voltage condition.

当过压保护时,产品输出功率不会损伤,当过压情况解除后,产品恢复正常。

5. Environment Requirements/环境要求

5.1. Operating Temperature and Relative Humidity/操作温/湿度要求

0°C to +40°C

10%RH to 90%RH

5.2. Storage Temperature and Relative Humidity/存储温/湿度要求

-20°C to +80°C

5%RH to 95%RH non-condensing.

5.3. Sea level 5,000 meters/海拔 5,000 米.

5.4. Vibration/振动

10 to 300Hz sweep at a constant acceleration of 1.0G(Breadth: 3.5mm) for 1Hour for each of the perpendicular axes X, Y, Z.

扫描频率: 10 to 300Hz, 恒定加速度: 1.0G(位移: 3.5mm), X, Y, Z 三垂直坐标轴向各振动 1 小时.

5.5. Drop Test/跌落

Height: 1m; the product should be fell off on the hardwood with the thickness of 20mm, Apply one times on all surfaces, total 6 times. The electric performance and Hi-Pot test must be OK after the drop tests.

跌落高度:1 米, 并跌落到厚度为 20mm 的硬木上, 6 个面, 每面各 1 次, 在跌落后电气性能及高压测试 OK.

6. Reliability Requirements/可靠性要求

6.1. Burn-in/煲机

The power supply shall be burn-in for 2 Hours under normal input and 80% rated load at $40^{\circ}\text{C} \pm 5^{\circ}\text{C}$.

产品至少要在 40°C ± 5°C 的环境及 80% 额定负载条件下煲机 2 小时。

6.2. MTBF/平均故障时间

The MTBF of power supply shall be over than 50,000 Hours @ 25°C 100% load.

平均间隔故障时间: 在 25°C, 额定输入与满载条件下, 至少工作 50,000 小时。

7. EMI/EMS Standards/EMI/EMS 标准

7.1. EMI Standards/EMI 标准

GB/T9254 GB17625.1

7.2. EMS Standards/EMS 标准

7-2-1 EN 61000-4-2, electrostatic discharge(ESD) requirement/静电抗扰度要求

Discharge characteristic/静电规格	Test level/测试条件	Test criteria/测试标准
Air discharge/空气放电	+/-8KV	B
Contact discharge/接触放电	+/-4KV	B

7-2-2 EN 61000-4-3, radiated electromagnetic field susceptibility(rs)/辐射骚扰场强

Test level/测试条件	Test criteria/测试标准
3V/m (r.m.s)	A
80-1000MHz, 80%AM(1KHz) sine-wave	

7-2-3 EN 61000-4-4, electric fast transients(burst) immunity requirement/电快速瞬变脉冲群

Coupling/测试端口	Test level/测试条件	Test criteria/测试标准
AC-input/交流输入	0.5KV	A
AC-input/交流输入	1KV	A

7-2-4 EN 61000-4-5, surge capability requirement/浪涌抗扰度要求

Surge voltage/雷击电压	judgment criteria/评定标准
Common mode/共模 +/-2KV	A
Differential mode/差模 +/-1KV	

7-2-5 EN 61000-4-6, Induced radio frequency fields conducted disturbances immunity requirement/电源端子传导骚扰实验

Test level/测试条件	Test criteria/测试标准
3V	A
0.15-80 MHz, 80%AM(1KHz)	

7-2-6 Assessment criteria /评估标准

Acceptance criteria 可接受标准	Performance 性能
A	Agreed operational behavior within the specified limits 性能不允许变化; 如果性能会发生变化, 则变化的范围在产品规格书规定的范围内.
B	Time limited functional diminishment or malfunction during the tests is permitted . The function is self-reactivated by the unit following completion of the tests . 设备在测试过程中, 性能降低允许在产品规格书要求范围内, 干扰消除后, 设备能恢复正常, 不允许出现复位和任何方式的人工干预.
C	Malfunction is permitted .The function can be reactivated either by reconnection to the mains or by operator intervention . 在测试过程中, 设备允许出现业务中断, 测试完毕后允许自行恢复或者人工干预恢复(包括硬件上干预); 测试中只允许初级防护器件损坏, 并且更换损坏的初级防护器件后, 设备能恢复正常

8. Safety Standards/安规标准

8.1. Dielectric Strength(Hi-pot)/介电耐压强度(高压)

Primary to Secondary: 3000Vac / 10mAMax / 60 second (when safety testing)

初级对次级: 3000Vac / 10mAMax / 60 秒 (安规试验)

Primary to Secondary: 3300Vac / 5mAMax /3S (when production)

初级对次级: 3300Vac / 5mAMax / 3S (生产作业)

8.2. Leakage Current/漏电流

0.25mA max. at 264Vac / 60Hz.

8.3. Insulation Resistance/绝缘阻抗


50MΩ min. at primary to secondary add 500Vdc test voltage

在初级与次级间加 500Vdc 进行测试

8.4. Regulatory Standards/安规标准

Type/安规	Country/国家	Standard/标准	State/状况	
CCC	China	GB4943.1	APPROVAL	

9. Mechanical Outline Drawing/外观示意图

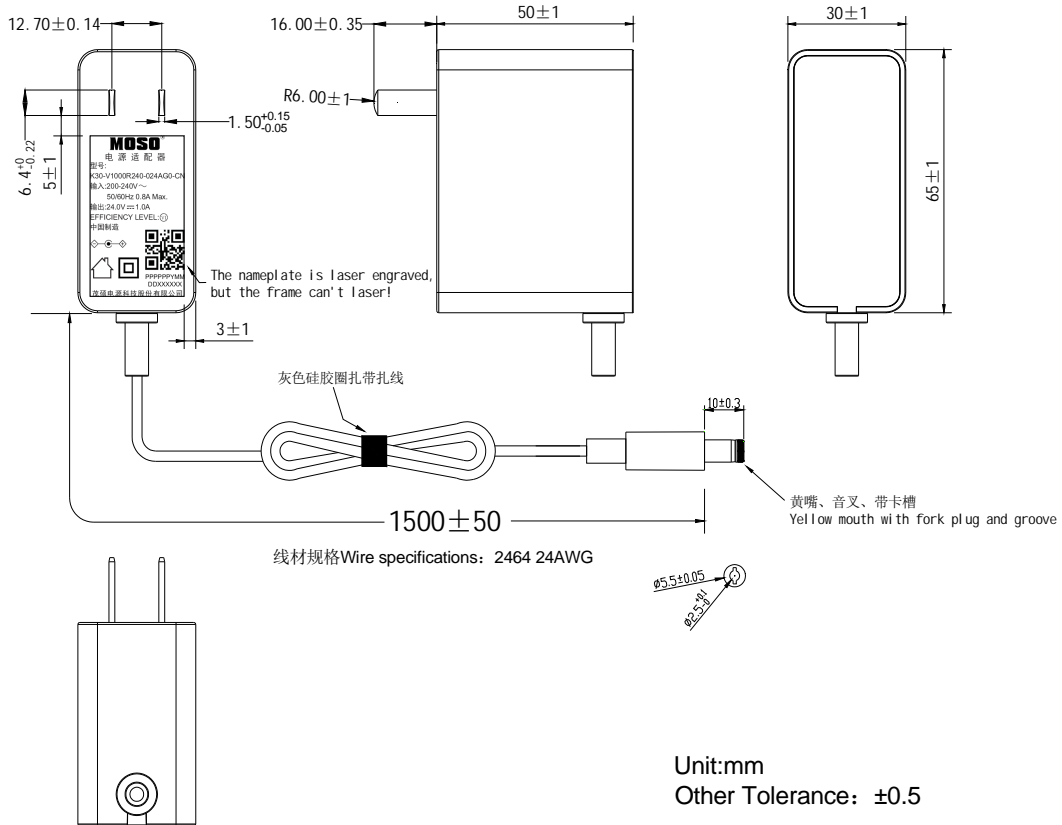


- 外壳材质: ■PC 耐温: 120℃
□PC+ABS 耐温: 95℃
备注: 1)PC 材质符合球压测试要求
2)外壳与线材为黑色

10. I/O Marking Drawing/铭牌示意图



Remark:

1. Above label is laser engraved.
2. The height dimension of double insulation mark can NOT less than 5mm.




下方内容与二维码居中
字体Arial

二维码格式/Code format: QR code
 二维码尺寸/Code size :10*10mm(±0.2)
 二维码扫描内容/Code content:PPPPPYMMDDXXXXXX 总共17位/17digits in total
 二维码解析如下/Code analysis:
 PPPPPP:product code(产品编码:实际S编码后六位,如SB190-U0,取B190U0)
 Y:producing year(产品实际生产年份,年份最后一位,如2022年,取2)
 MM:producing month(产品实际生产月份,如02月,取02)
 DD:producing date(产品实际生产日期,如15日,取15)
 XXXXXX:product listing number(产品序列号,000001-999999)




符合茂硕环保要求

11. Package Drawing/包装示意图

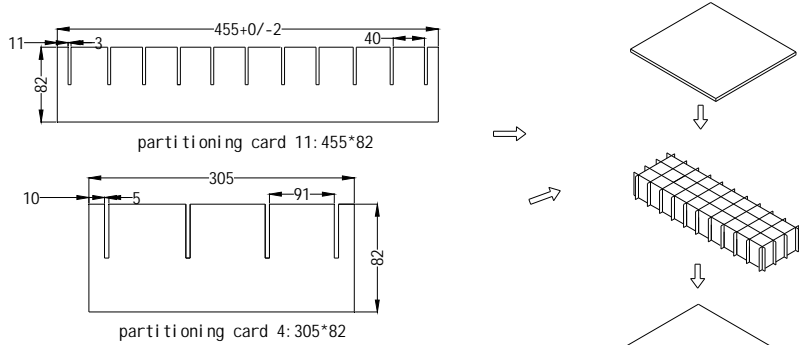


Packing Instruction:


- I. the product put in the bag 150*120(mm), then the packing product put in the pattiuning card groove, 30PCS/floor, 4 floors in all, 120PCS/box such as: 30pcs/floor*4floor=120PCS/box
- II. the usage of the packing materials:
 1. the usage of the 11 partitioning card 455*82: 16PCS
 2. the usage of the four partitioning card 305*82: 44PCS
 3. the usage of the PE bag 150*120: 120PCS
 4. the usage of the flat 455*305: 5PCS
 5. carton box 470*320*355: 1PCS
- III. Pallet stacke instruction:
 1. Pallet size is: L1000*W800*H100mm
 2. per floor set 4pcs
 3. stacke per 4floor*4pcs carton total 16pcs carton



470*320*355MM



Pallet stacking diagram



The product will be packed in the carton box and the box will be seled by the sticker

- PE 袋包装要求: PE 袋不用胶带封口;
 PE 袋用胶带封口;
 其它要求;

备注: 若客户未进行选择 PE 袋包装要求或备注时,
 我司默认采用 PE 袋不用胶带封口包装方式.