

参考规格书

SPECIFICATION FOR REFERENCE

CUSTOMER: 客 户:	
CUSTOMER P.N.: 客户料号:	
MODEL NO.: 产品型号:	V30-Z2500R120-030AB0-N
PRODUCT NO.: 产品编号:	SDXXX-N0
SAMPLE DATE: 送样日期:	2025-05-12

CUSTOMER AUTHORIZED SIGNATURE 客户承认签核		

Please return to us one copy of "SPECIFICATION FOR APPROVAL"
with you approved signature.

客户确认签字，盖章后请回传一份承认书给我司。

**ADD: MOSO Industrial Park, Nanshan District, Shenzhen, Guangdong
518108, P. R. China**

地址:深圳市南山区茂硕科技园

TEL: 86-755-27657000 27657555

P.C.: 518108

FAX: 86-755-27657908

E-mail:moso@mosopower.com

<http://www.mosopower.com>

MANUFACTURER AUTOGRAPH 制造商签名			
Reviser 修订	Confirm 确认	Checked 审查	Approval 批准

**** Table Of Content/目录 ****

1. SCOPE	4
1.1. Description /类型	4
1.2. Green Requirements/环保要求	4
1.3. Energy Efficiency Requirements/能效要求	4
2. Input Characteristics/输入特性	5
2.1. Input Voltage & Frequency/输入电压与频率	5
2.2. Input AC Current/AC 输入电流	5
2.3. Inrush Current (cold start)/浪涌电流(冷启动)	5
2.4. Average Efficiency 平均效率	5
2.5. Energy Consumption /空载功耗	5
3. Output Characteristics/输出特性	5
3.1. Static Output Characteristics <Vo & R+N>/静态输出特性	5
3.2. Line/ Load Regulation/线性/负载调整率	5
3.3. Turn - on Delay Time/开机延迟时间	5
3.4. Hold-up Time/关机维持时间	6
3.5. Rise Time/上升时间	6
3.6. Fall Time/下降时间	6
3.7. Output Overshoot / Undershoot/输出过冲/欠冲	6
3.8. Output Load Transient Response/输出负载瞬态响应	6
3.9. Capacitive Load Test/容性负载测试	6
4. Protection Requirements/保护要求	6
4.1. Over Current Protection/过流保护	6
4.2. Short Circuit Protection/短路保护	6
4.3. Over Voltage Protection/过压保护	6
5. Environment Requirements/环境要求	7
5.1. Operating Temperature and Relative Humidity/操作温/湿度要求	7
5.2. Storage Temperature and Relative Humidity/存储温/湿度要求	7
5.3. Vibration/振动	7
5.4. Drop Test/跌落	7
6. Reliability Requirements/可靠性要求	7
6.1. Burn-in/老化	7
6.2. MTBF/平均故障时间	7
6.3. Power adapter lifetime/电源适配器寿命	7
7. EMI/EMS Standards/EMI/EMS 标准	8
7.1. EMI Standards/EMI 标准	8
7.2. EMS Standards/EMS 标准	8

8. Safety Standards/安规标准	9
8.1. Dielectric Strength(Hi-pot)/介电耐压强度(高压).....	9
8.2. Leakage Current/漏电流	9
8.3. Insulation Resistance/绝缘阻抗	9
8.4. Regulatory Standards/安规标准	9
9. Mechanical Outline Drawing/外观示意图	10
10. I/O Marking Drawing/铭牌示意图.....	11
11. Package Drawing/包装示意图	12

1. SCOPE

The document detail the electrical, mechanical and environmental specifications of a SMPS, the power supply provide 30W continuous output power.

资料详细描述了一款 **30W(连续输出功率)**开关电源的电气性,结构性及环境等要求.

The power supply shall meet the HSF requirement.

此款电源符合 **HSF** 要求.

1.1.Description /类型

- SMPS Adaptor(Wall mount)/插墙式适配器 SMPS Adaptor(Desk-top)/桌面型适配器
 Open Frame/开放式结构 SMPS Unit (With Case)/带铁壳型
 Others/其他

1.2.Green Requirements/环保要求

- RoHS:2011/65/EU & (EU) 2015/863;
 REACH:1907/2006/EC;
 Halogen-free:IEC 61249-2-21;
 CA Prop 65;
 POPs:(EU)2023/1608;
 PAHs: 2005/69/EC;
 Packaging Directive:94/62/EC;
 US EPA Toxic Substances Control Act (TSCA);
 MOSO Environmental standards: WI-QM006-G;
 Others

1.3.Energy Efficiency Requirements/能效要求

No.	Country/国家地区	Energy efficiency abbreviation/能效简称	Whether it meets the requirements/是否符合(YES/是 <input checked="" type="checkbox"/> , NO/否 <input type="checkbox"/>)
1	USA/美国	DoE VI	<input checked="" type="checkbox"/>
2		CEC	<input type="checkbox"/>
3	Canada/加拿大	NRCAN	<input type="checkbox"/>
4	Australia/New Zealand/ 澳大利亚/新西兰	GEMS	<input type="checkbox"/>
5	Europe/欧盟	Erp VI	<input checked="" type="checkbox"/>
6		CoC V5 Tier 2	<input type="checkbox"/>
7	South Korea/韩国	KMEPS	<input type="checkbox"/>
8	Mexico/墨西哥	MEPS	<input type="checkbox"/>
9	Byelorussia/白俄罗斯	MEPS	<input type="checkbox"/>

2. Input Characteristics/输入特性

2.1. Input Voltage & Frequency/输入电压与频率

The range of input voltage is from 90Vac to 264Vac single phase.

输入电压范围: 从 90Vac 到 264Vac, 单相输入。

	Minimum/最小	Nominal/额定值	Maximum/最大
Input Voltage/输入电压	90Vac	100Vac~240Vac	264Vac
Input Frequency/输入频率	47Hz	60Hz/50Hz	63Hz

2.2. Input AC Current/AC 输入电流

1.0A max. @ 100-240Vac input & Full load.

输入电压 100-240Vac 满载时, 输入电流不超过 1.0A。

2.3. Inrush Current (cold start)/浪涌电流(冷启动)

60A max. @ 100Vac input

输入电压 100Vac 时, 输入电流不超过 60A。

2.4. Average Efficiency 平均效率

86.95% min. @ 100Vac 60Hz/230Vac 50Hz input (@25%, 50%, 75% and 100% of max load)

输入电压 100V 60Hz/230V 50Hz 时, 25%、50%、75%和 100%载时的平均效率不低于 86.95%。

2.5. Energy Consumption /空载功耗

No load Consumption $\leq 0.1W$ (100Vac/60Hz, 230Vac/50Hz)

输入电压 100Vac/60Hz, 230Vac/50Hz 时, 空载功耗均小于 0.1W。

3. Output Characteristics/输出特性

3.1. Static Output Characteristics <Vo & R+N>/静态输出特性

Output Rate	Rated Load/额定负载			Output Range 输出电压范围	R+N 纹波与噪声	Remark 备注
	Min. Load	Max. Load	Peak Load			
+12V	0.0A	2.5A	3A	11.4V ~ 12.6V	120mVp-p	100-240V

Ripple & Noise: Measurement is done by 20MHz b width oscilloscope paralleled a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor. (test under the condition of rated input and rated output)。

纹波与噪声: 测量时, 示波器选用 20MHz 带宽限制, 输出端要并联一颗 0.1uF 的陶瓷电容和一颗 47uF 的电解电容。(在额定输入及输出的条件下检测)。

3.2. Line/ Load Regulation/线性/负载调整率

Output Rate	Load Condition/负载条件		Line Regulation 线性调整率	Load Regulation 负载调整率	Remark 备注
	Min. Load	Max. Load			
+12V	0.0A	2.5A	$\pm 3\%$	$\pm 5\%$	

3.3. Turn - on Delay Time/开机延迟时间

3S max. @ 100-240Vac input & Full load.

输入电压 **100-240Vac** 满载时, 开机延迟时间不超过 **3S**。

3.4. Hold-up Time/关机维持时间

10mS min. @ Full load & 100Vac/60Hz input turn off at the worst case.

输入电压 **100Vac/60Hz** 满载时, 关机时间最差情况不小于 **10 毫秒**。

20mS min. @ Full load & 230Vac/50Hz input turn off at the worst case.

输入电压 **230Vac/50Hz** 满载时, 关机时间最差情况不小于 **20 毫秒**。

3.5. Rise Time/上升时间

60mS max. @ Rated load.

额定负载时, 上升时间不超过 **60 毫秒**。

3.6. Fall Time/下降时间

30mS max. @ Rated load.

额定负载时, 下降时间不超过 **30 毫秒**。

3.7. Output Overshoot / Undershoot/输出过冲/欠冲

10% max. When the power on or off, when it is the full input voltage and full load.

开关机时, 输出过冲/欠冲均不大于 **10%**。

3.8. Output Load Transient Response/输出负载瞬态响应

Output voltage within 10.8V~13.2V. for load step from 25% to 75% to 25%, R/S: 0.1A/uS,
Frequency: 100Hz duration and 8mS at 80%.

输出电压在 **10.8V~13.2V** 之内 对于 **25% 到 75% 到 25%** 的负载阶跃, **R / S: 0.1A / uS**,
频率: 持续时间为 **100Hz**, **75%** 时为 **8mS**。

3.9. Capacitive Load Test/容性负载测试

Start normally @ Full Load & C=2000uF at 100Vac/240Vac.

输入电压 **100-240Vac** 满载时, 电解电容 = **2000uF**. 正常启动。

4. Protection Requirements/保护要求

4.1. Over Current Protection/过流保护

Over Current Point Limited/过流点限制: $I > 3A$ (100-240Vac)

The output shall hiccup when the over currents applied to the output rail, and shall be self-recovery when the fault condition is removed.

当过电流时, 输出将进入打嗝模式, 当过流情况解除后, 产品将会自动恢复正常。

4.2. Short Circuit Protection/短路保护

The input power shall decrease when the output rail short, the power supply shall no damage, and shall be self-recovery when the fault condition is removed.

当输出短路时, 产品输入功率降低且不会损伤, 当短路情况解除后, 产品将会自动恢复正常。

4.3. Over Voltage Protection/过压保护

The power supply has to be protected against over voltage conditions. No damage allowed. The power supply must come back to nominal working without on/off powering after removal of the over voltage condition. $OVP < 18V$.

当过压保护时, 产品输出功率不会损伤, 当过压情况解除后, 产品恢复正常. **OVP < 18V**。

5. Environment Requirements/环境要求

5.1. Operating Temperature and Relative Humidity/操作温/湿度要求

-5°C to +45°C

5%RH to 95%RH

5.2. Storage Temperature and Relative Humidity/存储温/湿度要求

-40°C to +85°C

5%RH to 95%RH non-condensing @ Sea level shall be low 5,000 meters.

5.3. Vibration/振动

10 to 300Hz sweep at a constant acceleration of 1.0G(Breadth: 3.5mm) for 1Hour for each of the perpendicular axes X, Y, Z.

扫描频率: 10 to 300Hz, 加速度: 1.0G(位移: 3.5mm), X, Y, Z 三垂直坐标轴向各振动 1 小时.

5.4. Drop Test/跌落

Height: 1m; the product should be fell off on the concrete floor with the thickness of 20mm, Apply one time on all surfaces, totally 6 surfaces. The electric performance and safety test after the drop test must be OK.

跌落高度:1m, 并跌落到厚度为 20mm 的水泥地板上,6 次,每面各 1 次, 在跌落后电气性能及安全测试 OK.

6. Reliability Requirements/可靠性要求

6.1. Burn-in/老化

The power supply shall be burn-in for 4 Hours under normal input and 80% rated load at 40°C ± 5°C , the electric performance and Hi-Pot test must be OK.

40°C ± 5°C, 电源在正常输入电压和 80%额定负载条件下老化 4 小时后, 电气性能及高压测试 OK。

6.2. MTBF/平均故障时间

The MTBF shall be at least 100,0000 H at 25°C, under 100% load and 100V/230VAC input condition. Reference standards:Telcordia SR-332 Issue4.

25°C环境下, 在 100%负载和 100V/230VAC 输入条件, 平均故障时间至少 100 万小时.

参考标准: Telcordia SR-332 Issue4.

6.3. Power adapter lifetime/电源适配器寿命

The PSU must be with lifetime of 7 years @25°C @100% load@100Vac/60Hz and 230Vac/50Hz input.

在 25 度环境下, 满载和 100V/230VAC 输入电压, 电源寿命至少达 7 年

7. EMI/EMS Standards/EMI/EMS 标准

7.1.EMI Standards/EMI 标准

J55032

7.2.EMS Standards/EMS 标准

7-2-1 EN 61000-4-2,electrostatic discharge(ESD) requirement/静电抗扰度要求

Discharge characteristic/静电规格	Test level/测试条件	Test criteria/测试标准
Air discharge/空气放电	+/-15KV	B
Contact discharge/接触放电	+/-8KV	B

7-2-2 EN 61000-4-3,radiated electromagnetic field susceptibility(rs)/辐射骚扰场强

Test level/测试条件	Test criteria/测试标准
3V/m (r.m.s)	A
80-1000MHz,80%AM(1KHz) sine-wave	

7-2-3 EN 61000-4-4,electric fast transients(burst) immunity requirement/电快速瞬变脉冲群

Coupling/测试端口	Test level/测试条件	Test criteria/测试标准
AC-input/交流输入	2KV	B
AC-input/交流输入	2KV	B

7-2-4 EN 61000-4-5,surge capability requirement/浪涌抗扰度要求

Surge voltage/雷击电压	judgment criteria/评定标准
Common mode/共模 +/-2KV	B
Differential mode/差模 +/-1KV	

7-2-5 EN 61000-4-6, Induced radio frequency fields conducted disturbances immunity requirement/电源端子传导骚扰实验

Test level/测试条件	Test criteria/测试标准
3V	A
0.15-80 MHz,80%AM(1KHz)	

7-2-6 Assessment criteria /评估标准

Acceptance criteria 可接受标准	Performance 性能
A	Agreed operational behavior within the specified limits 性能不允许变化; 如果性能会发生变化, 则变化的范围在产品规格书规定的范围内.
B	Time limited functional diminishment or malfunction during the tests is permitted . The function is self-reactivated by the unit following completion of the tests . 设备在测试过程中, 性能降低允许在产品规格书要求范围内, 干扰消除后, 设备能恢复正常, 不允许出现复位和任何方式的人工干预.
C	Malfunction is permitted .The function can be reactivated either by reconnection to the mains or by operator intervention . 在测试过程中, 设备允许出现业务中断, 测试完毕后允许自行恢复或者人工干预恢复(包括硬件上干预); 测试中只允许初级防护器件损坏, 并且更换损坏的初级防护器件后, 设备能恢复正常

8. Safety Standards/安规标准

8.1.Dielectric Strength(Hi-pot)/介电耐压强度(高压)

Primary to Secondary: 3000Vac / 10mA Max / 60 second (when safety testing)

初级对次级: **3000Vac / 10mA Max / 60 秒** (安规试验)

Primary to Secondary: 3300Vac / 5mA Max /3S (when production)

初级对次级: **3300Vac / 5mA Max / 3S** (生产作业)

8.2.Leakage Current/漏电流

0.25mA max. at 264Vac / 60Hz.

8.3.Insulation Resistance/绝缘阻抗


100MΩ min. at primary to secondary add 500Vdc test voltage

在初级与次级间加 **500Vdc** 进行测试, 绝缘阻抗至少 **100MΩ** .

8.4.Regulatory Standards/安规标准

Type/安规	Country/国家	Standard/标准	State/状况	
PSE	Japan	J62368-1	APPROVAL	

9. Mechanical Outline Drawing/外观示意图

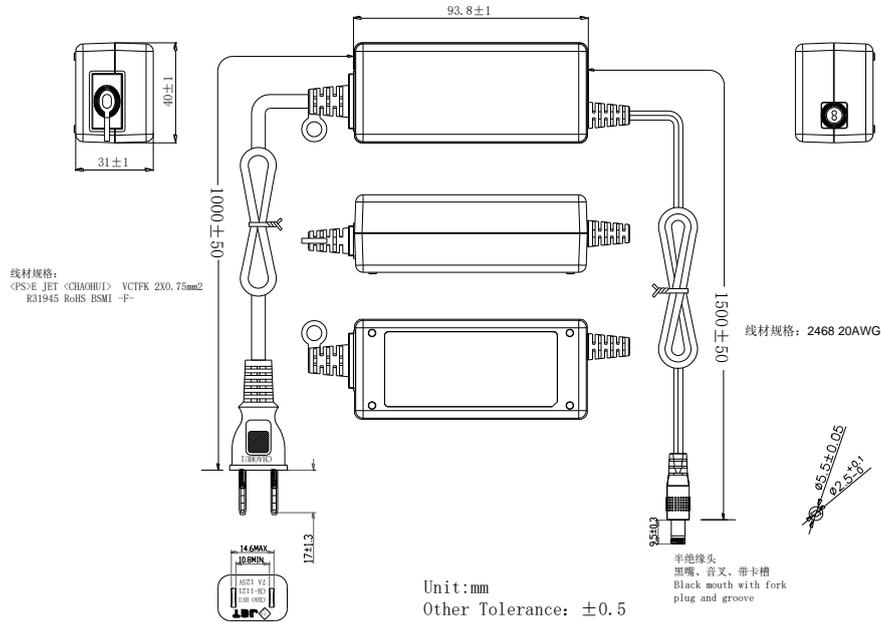

外壳材质: PC 耐温: 120°C

PC+ABS 耐温: 95°C

备注: 1)PC 材质符合球压测试要求;


2)外壳与 DC 线为黑色.

10. I/O Marking Drawing/铭牌示意图



紫光镭射


1. Above label is laser engraved.
2. The dimension of double insulation mark can not less than 5mm.
3. The dimension of garbage bin mark can not less than 7mm.



下方内容与二维码居中
字体Arial

二维码格式/Code format: QR code
 二维码尺寸/Code size :10*10mm(±0.2)
 二维码扫描内容/Code content:5096180502YMMDDXXXXXX 总共21位/21digits in total
 二维码解析如下/Code analysis:
 5096180502:Customer PN(客户料号十位,固定)
 Y:producing year(产品实际生产年份,年份最后一位,如2022年,取2)
 MM:producing month(产品实际生产月份,如02月,取02)
 DD:producing date(产品实际生产日期,如15日,取15)
 XXXXX:product listing number(产品序列号,000001-999999)

11. Package Drawing/包装示意图

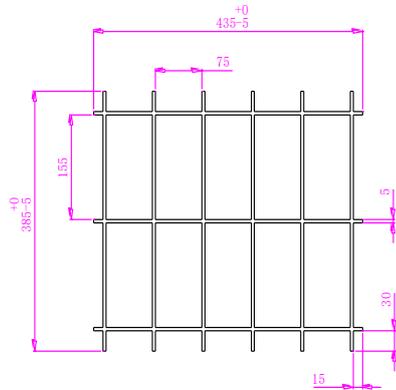


包装说明:




- 一、产品放进PE袋, 将包装的产品放入刀卡槽中, 每层装10PCS, 共装6层, 每箱装60PCS
即: 10pcs/层*6层=60PCS/箱
- 二、包装材料使用说明为:
 - 1、组合刀卡435*385用量: 6PCS
 - 2、平卡435*375用量: 7PCS
 - 3、PE袋250*120用量: 120PCS
 - 4、纸箱450*390*335: 1PCS

三、栈板堆放说明为:

- 1、栈板尺寸为: L1200*W950*H135mm
- 2、每层放2行*3列=6箱
- 3、竖直堆放4层*6箱共24箱

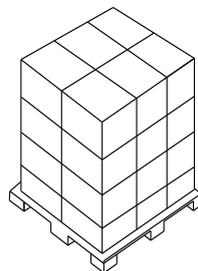


栈板堆放示意图

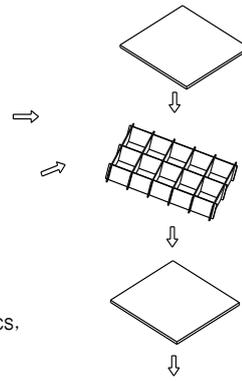


450*390*335MM

纸箱的外尺寸: 450L*390W*335H



标签粘贴示意

送货日期标



产品装入包装箱用胶袋封箱, 位置参考图中所示.

- PE 袋包装要求: PE 袋不用胶带封口;
 PE 袋用胶带封口;
 其它要求;

备注: 若客户未进行选择 PE 袋包装要求或备注时,
 我司默认采用 PE 袋不用胶带封口包装方式.