

SPECIFICATION FOR REFERENCE

CUSTOMER : _____

CUSTOMER P.N. : _____

MODEL NO. : _____ **MS-V3000R120-036L0-US** _____

PRODUCT NO. : _____ **SCXXX-U0/XXXXXX** _____

SAMPLE DATE : _____ **2023-08-11** _____

CUSTOMER AUTHORIZED SIGNATURE		

Please return to us one copy of "SPECIFICATION FOR APPROVAL"
with your approved signature.

**ADD: MOSO Industrial Park, Nanshan District, Shenzhen, Guangdong
518108, P. R. China**

TEL: 86-755-27657000 27657555 P.C.: 518108

FAX: 86-755-27657908

E-mail:moso@mosopower.com

<http://www.mosopower.com>

Prepared By :	Checked By :	Safetied By:	Approved By :

**** Table of Content ****

1. SCOPE	4
1.1. Description.....	4
2. Input Characteristics.....	4
2.1. Input Voltage & Frequency.....	4
2.2. Input AC Current.....	4
2.3. Inrush Current (cold start).....	4
2.4. Average Efficiency (Meet COC V5 Tier2)	4
2.5. Energy Consumption.....	4
3. Output Characteristics	4
3.1. Static Output Characteristics <Vo & R+N>.....	4
3.2. Line/ Load Regulation.....	4
3.3. Turn - on Delay Time.....	5
3.4. Hold-up Time	5
3.5. Rise Time	5
3.6. Fall Time	5
3.7. Output Overshoot / Undershoot.....	5
3.8. Output Load Transient Response	5
4. Protection Requirements	5
4.1. Over Current Protection.....	5
4.2. Short Circuit Protection	5
4.3. Over Voltage Protection	5
5. Environment Requirements.....	5
5.1. Operating Temperature and Relative Humidity	5
5.2. Storage Temperature and Relative Humidity	5
5.3. Sea level 5,000 meters.....	5
5.4. Vibration.....	5
5.5. Drop Test.....	6
6. Reliability Requirements	6
6.1. Burn-in.....	6
6.2. MTBF.....	6
6.3. E-caps lifetime	6
7. EMC Standards	6
7.1. EMI Standards	6
7.2. EMS Standards	6
8. Safety Standards	7
8.1. Dielectric Strength (Hi-pot).....	7
8.2. Leakage Current.....	7

8.3. Insulation Resistance	7
8.4. Regulatory Standards.....	7
9. Mechanical Outline Drawing.....	8
10. I/O Marking Drawing.....	9
11. Package Drawing.....	10

1. SCOPE

The document detail the electrical, mechanical and environmental specifications of a SMPS, the power supply provide 36W continuous output power. NO-Y。

The power supply shall meet the **HSF** requirement.

1.1. Description

- SMPS Adaptor (Wall mount)
 SMPS Adaptor (Desk-top)
 Open Frame
 SMPS Unit (With Case)
 Others

2. Input Characteristics

2.1. Input Voltage & Frequency

The range of input voltage is from 90Vac to 264Vac single phase.

	Minimum	Normal	Maximum
Input Voltage	90Vac	100Vac~240Vac	264Vac
Input Frequency	47Hz	50Hz/60Hz	63Hz

2.2. Input AC Current

1.0A max. @ 100-240Vac input & Full load.

2.3. Inrush Current (cold start)

No damage shall be presented at the cold start

2.4. Average Efficiency (Meet COC V5 Tier2)

88.30% min. @ 115Vac 60Hz/230Vac 50Hz input (@25%, 50%, 75% and 100% of max load).

78.30% min. @ 115Vac 60Hz/230Vac 50Hz input @10% of max load.

2.5. Energy Consumption

No load Consumption $\leq 0.075W$ (115Vac/60Hz, 230Vac/50Hz).

3. Output Characteristics

3.1. Static Output Characteristics <Vo & R+N>

Output Rate	Rated Load		Output Range	R+N	Remark
	Min. Load	Max. Load			
+12.0V	0.0A	3.0A	11.4V ~ 12.6V	150mVp-p	100-240V

Ripple & Noise: Measurement is done by 20MHz bandwidth oscilloscope and the output paralleled a 0.1uF ceramic capacitor and a 47uF Electrolytic capacitor. (Test under the condition of rated input and rated output).

3.2. Line/ Load Regulation

Output Rate	Load Condition		Line Regulation	Load Regulation	Remark
	Min. Load	Max. Load			
+12.0V	0.0A	3.0A	$\pm 2\%$	$\pm 5\%$	

3.3.Turn - on Delay Time

3S max. @ 100-240Vac input & Full load.

3.4.Hold-up Time

10mS min. @ Full load & 115Vac/60Hz input turn off at the worst case.

20mS min. @ Full load & 230Vac/50Hz input turn off at the worst case.

3.5.Rise Time

50mS max. @ Rated load.

3.6.Fall Time

50mS max. @ Full load.

3.7.Output Overshoot / Undershoot

10% max. When the power on or off, when it is the full input voltage and full load.

3.8.Output Load Transient Response

Output voltage within 10.8V~13.2V for load step from 20% to 80%, R/S: 0.5A/uS,
frequency: 100Hz duration and 8mS at 80%.

4. Protection Requirements

4.1.Over Current Protection

Over Current Point Limited: $6A > I > 3.3A$ (100-240Vac)

The output shall hiccup when the over current applied to the output rail, and shall be self-recovery when the fault condition is removed.

4.2.Short Circuit Protection

The input power shall decrease when the output rail short, the power supply shall no damage, and shall be self-recovery when the fault condition is removed.

4.3.Over Voltage Protection

The power supply has to be protected against over voltage conditions. No damage allowed.
The power supply must come back to nominal working without on/off powering after removal of the over voltage condition.

5. Environment Requirements

5.1.Operating Temperature and Relative Humidity

0°C to +40°C

10%RH to 90%RH

5.2.Storage Temperature and Relative Humidity

-20°C to +70°C,

5%RH to 95%RH

5.3.Sea level 5,000 meters

5.4.Vibration

10 to 300Hz sweep at a constant acceleration of 1.0G(Breadth: 3.5mm) for 1Hour for each of the perpendicular axes X, Y, Z.

5.5.Drop Test

Height: 1m; the product should be fell off on the hardwood with the thickness of 20mm, Apply one times on all surfaces, total 6 times. The electric performance and Hi-Pot test must be OK after the drop tests.

6. Reliability Requirements

6.1.Burn-in

The power supply shall be burn-in for 4 Hours under normal input and 80%rated load at $40^{\circ}\text{C} \pm 5^{\circ}\text{C}$. the electric performance and Hi-Pot test must be OK.

6.2.MTBF

The MTBF shall be at least 50,000H at 25°C , under 100% load and 115V/230VAC input condition. Standard:SR-332。

6.3.E-caps lifetime

The E-caps used in this PSU must be with lifetime of 3 years @ 25°C under 115V/230VAC input condition.

7. EMC Standards

7.1.EMI Standards

FCC Part 15

7.2. EMS Standards

7-2-1 EN 61000-4-2, electrostatic discharge (ESD) requirement

Discharge characteristic	Test level	Test criteria
Air discharge	+/-15KV	A
Contact discharge	+/-8KV	A

7-2-2 EN 61000-4-3, radiated electromagnetic field susceptibility (rs)

Test level	Test criteria
3V/m (r.m.s)	A
80-1000MHz,80%AM(1KHz) sine-wave	

7-2-3 EN 61000-4-4, electric fast transients (burst) immunity requirement

Coupling	Test level	Test criteria
AC-input	1KV	A
AC-input	2KV	A

7-2-4 EN61000-4-5, surge capability requirement

Surge voltage	judgment criteria
Common mode/ +/-2KV	A
Differential mode/ +/-1KV	

7-2-5 EN 61000-4-6, Induced radio frequency fields conducted disturbances immunity requirement

Test level	Test criteria
3V	A
0.15-80 MHz,80%AM(1KHz)	

7-2-6 Assessment criteria

Acceptance criteria	Performance
A	Agreed operational behavior within the specified limits.
B	Time limited functional diminishment or malfunction during the tests is permitted. The function is self-reactivated by the unit following completion of the tests.
C	Malfunction is permitted .The function can be reactivated either by reconnection to the mains or by operator intervention.

8. Safety Standards

8.1.Dielectric Strength (Hi-pot)

Primary to Secondary: 3000Vac or 4242Vdc/10mA max. / 60second.

Primary to Secondary: 3300Vac or 4666Vdc/5mA max. /3S for production.

8.2.Leakage Current

0.25mA max. at 264Vac / 60Hz.


8.3.Insulation Resistance

50MΩ min. at primary to secondary add 500Vdc test voltage.

8.4.Regulatory Standards

Type	Country	Standard	State	Note
UL	USA	UL62368-1	MEET	

9. Mechanical Outline Drawing

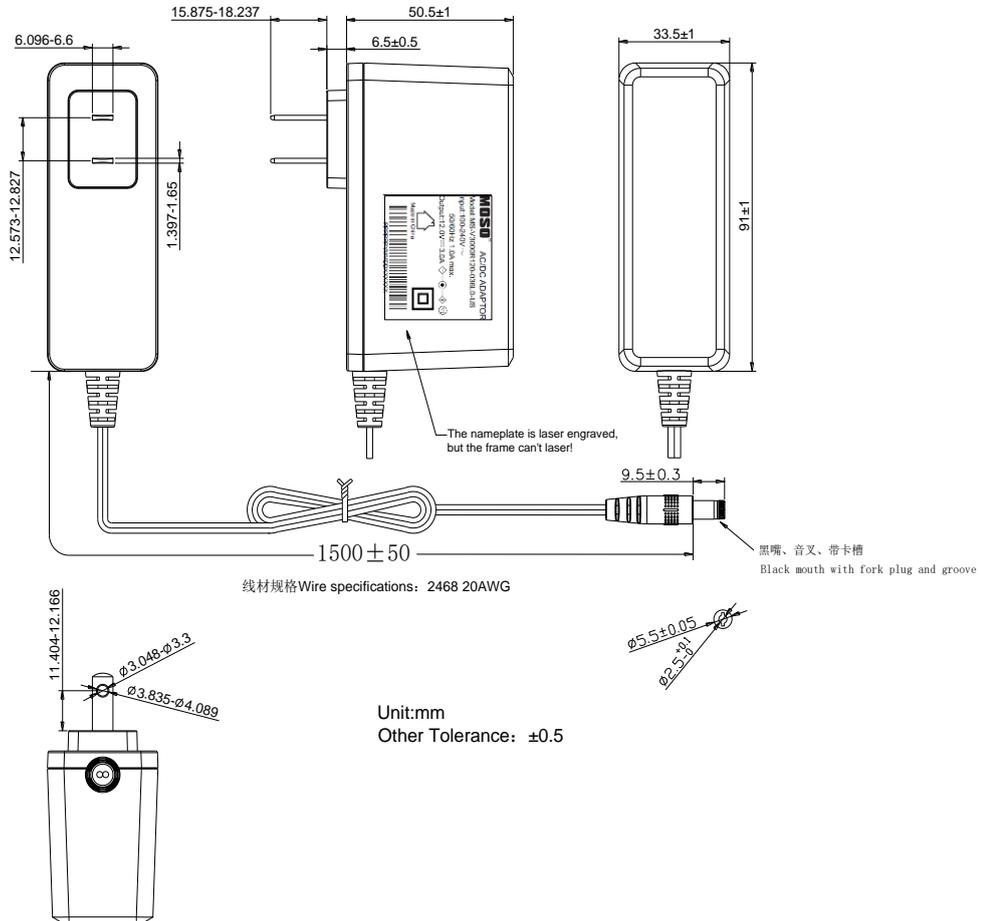


Case material: ■ PC temperature resistance: 120°C

□ PC+ABS temperature resistance: 95°C

Remark: 1) PC material compliances with ball pressure testing requirement.


2) The color of the casing and DC cable are Black.

10. I/O Marking Drawing

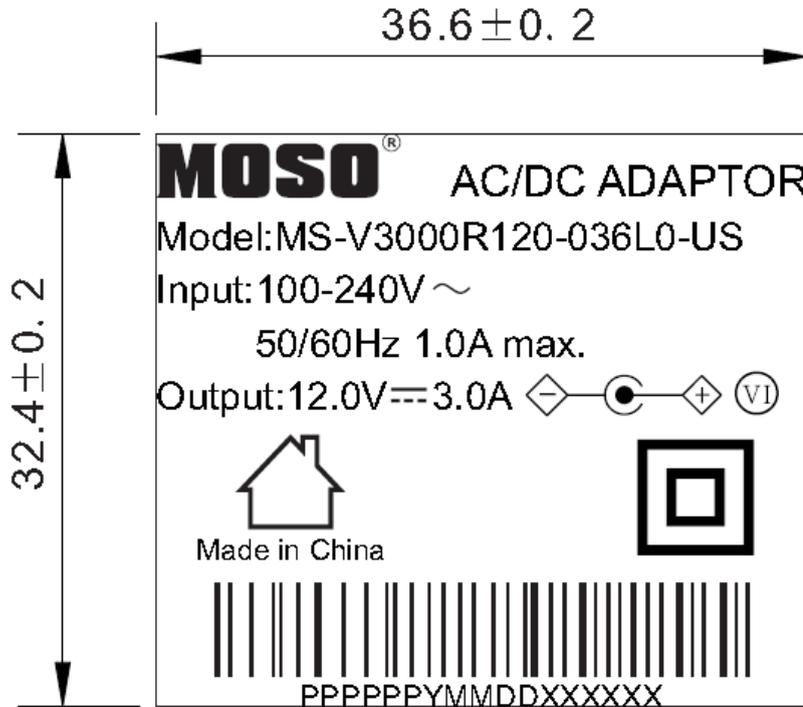


Remark:

1. Above label is laser engraved.
2. The dimension of double insulation mark can NOT less than 5mm.

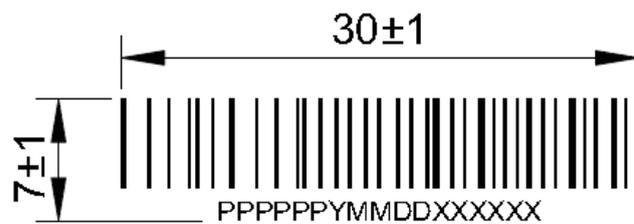


- product code(产品编码:实际S编码后六位, 如SC712-U1,取C712U1)
- producing year(产品实际生产年份,年份最后一位, 如2023年, 取3)
- producing month(产品实际生产月份, 如11月, 取11)
- producing date(产品实际生产日期, 如12日, 取12)
- product listing number(产品序列号,000001-999999)

11. Package Drawing

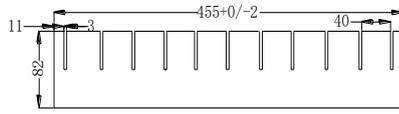




Partitioning card 11:455*82

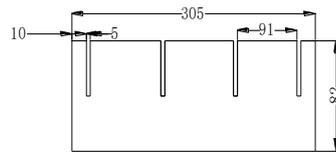

partitioning card 4:305*82


Packing Instruction:

- 1、the product put in the PE bag ,
then the packing product put in the
partitioning card groove , 30PCS/floor,
4 floors in all, 120PCS/box
such as: 30pcs/floor*4floor=120PCS/box
- 2、the usage of the packing materials:
 - 1)the usage of the four partitioning card 305*82: 44PCS
 - 2)the usage of the eleven partitioning card 455*82: 16PCS
 - 3)the usage of the PE bag 250*120: 120PCS
 - 4)the usage of the flat 455*305:5PCS
 - 5)carton box 470*320*355: 1PCS
- 3、Pallet stacke instruction:
 - 1)Pallet size is:L1100*W950*H135mm
 - 2)per floor set 6pcs
 - 3)stacke per 4floor*6pcs carton
total 24 pcs carton

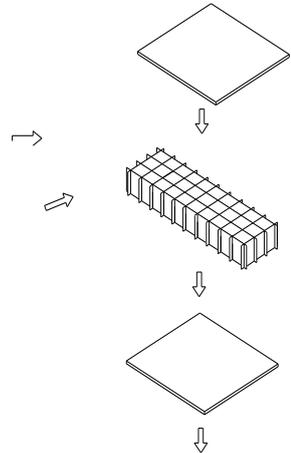


470*320*355MM

P/O NO.
ITEM NO.
QTY: PCS
G.W.: N.W.:
CTN SIZE:

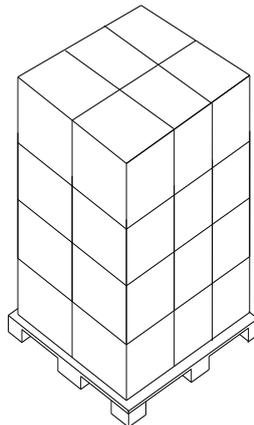

The pallet stack drawing

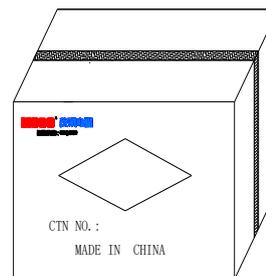

The product will be packed in the carton
box and the box will be sealed by the sticker

- The requirement of PE bag packing: PE bag without sealing by adhesive tape.
 PE bag with sealing by adhesive tape
 Other requirement.

Remark: If the customer has not chose the PE bag packing way,
we will use the PE bag without sealing by adhesive tape.